
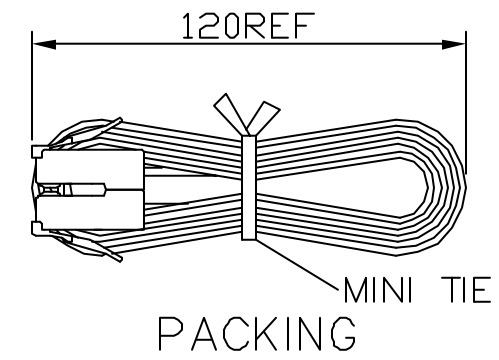


NOTES:


1. CABLE [26AWG(7/0.163)X6F] BARE
 INSULATION: PP, OD=∅0.95±0.05mm,
 COLOR: SEE SECTION A-A.
 JACKET: PVC, OD=(2.6X6.8)±0.1mm,
 COLOR: BLACK(BRIGHT).
 CUTTING LENGTH: 610±5mm
2. 100%TEST: OPEN, SHORT, MISWIRE
3. INSULATION RESISTANCE: DC100V, 100(ohm)MIN
4. RoHS COMPLIANT.
5. Specify Length as Suffix on Part Number in mm.
 For Example:
 RJ25Y-10244-610 = 610 mm Long Cable.

WIRING

C1	COLOR	C2
1	WHITE	1
2	BLACK	2
3	RED	3
4	GREEN	4
5	YELLOW	5
6	BLUE	6

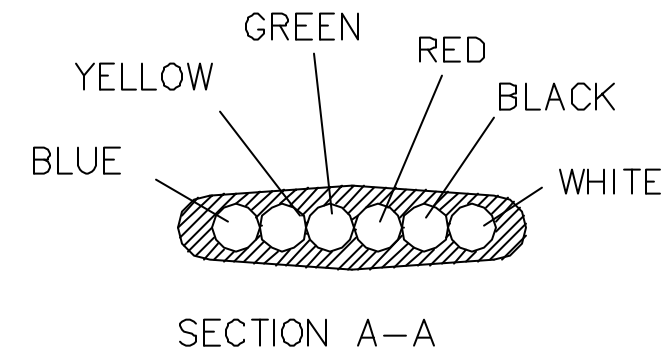

ORDER INFORMATION

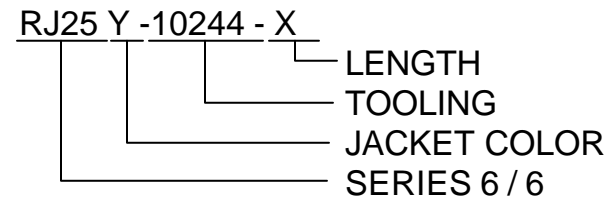

NO.	DESCRIPTION	MATERIAL	Q'TY	P/N
2	CABLE			
1	RJ12 6P6C	GOLD FLASH	2PCS	

TOLERANCE	
LINEAR	ANGLES
X.±	X'±
.X±0.25	.X'±
.XX±0.15	.XX'±
.XXX±0.05	.XXX'±



TITLE: RJ25 6P6C CABLE ASSY			
PART NO. RJ25Y-10244-X		DWG NO. SC-10244	
UNITS	SCALE	SHEET	REV
MM	NONE	1 OF 1	A

REV	ISSUED	AXL	1/3/06'
REV	ECN NO.	NAME	DATE

APPD:	MAT'L:
CHKD:	FINISH:
DRWN: AXL	Q'TY:

