


NOTES:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
  - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED  
WITH HARD GOLD AND GOLD FLASH IN  
SOLDER AREA.
  - SHIELD-0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.


ORDER INFORMATION

RJ4R-2U 08-C K 1 3 T 1Q  
① ② ③ ④ ⑤ ⑥ ⑦


- CONNECTOR:  
RJ4R: RJ45 R/A CONNECTOR
- TYPE:  
2U: FEMALE, DIP TYPE
- POSITIONS  
08: 8 POSTIONS
- INSULATOR MATERIAL  
C: NYLON 46
- INSULATOR COLOR  
K: BLACK
- CONTACT PLATING  
1: PLATED WITH HARD GOLD AND  
GOLD FLASH IN SOLDER AREA
- SHIELD PLATING  
3: NICKEL PLATING

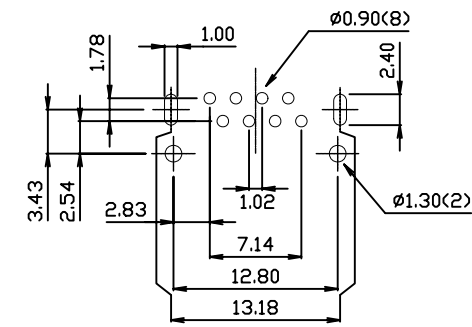

PCB LAYOUT  
Ref.

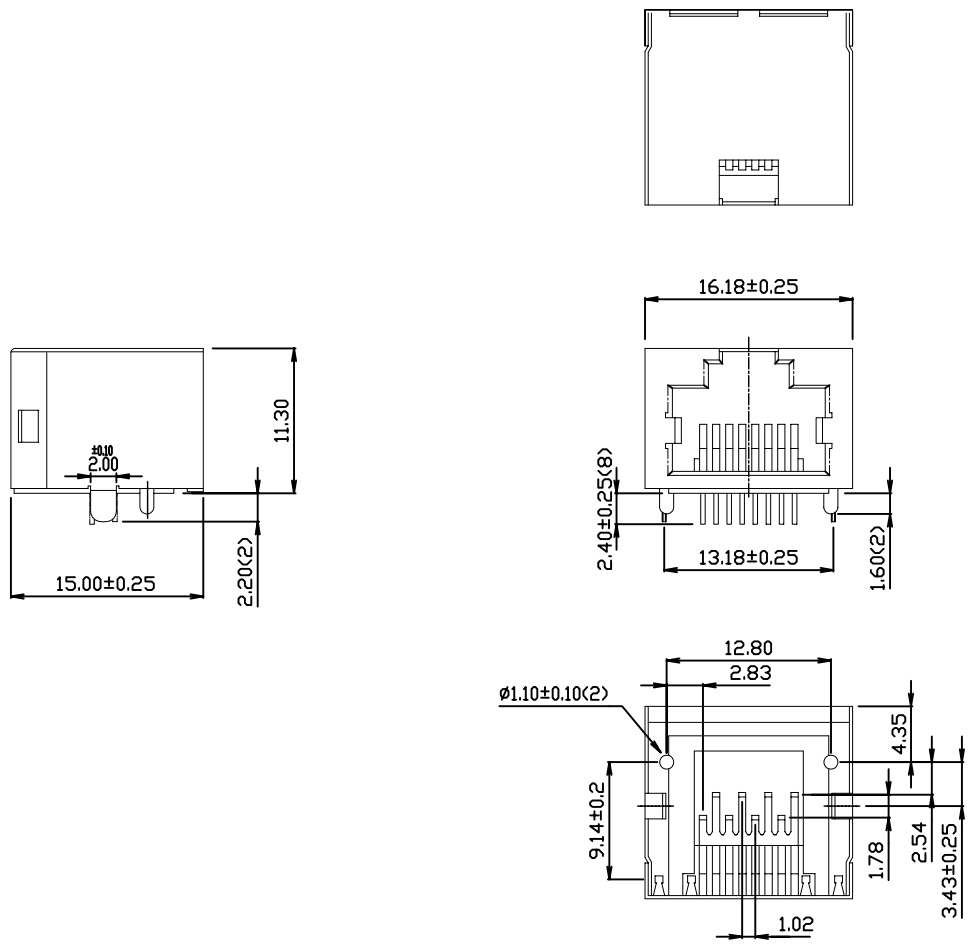

RoHS Compliant

TOLERANCE		 7F, No. 191, Sec. 2 Chung-Yang Rd., Tu-Cheng City Taipei Hsien, Taiwan A Genesis Electro-Mechanical Company	TITLE: RJ45 RECEPTACLE CONNECTOR						
LINEAR	ANGLES		PART NO. RJ4R-2U08-CK13T1Q						
X. ± 0.38	X° ± 0°30°		DWG NO. GTI09-25091						
.X ± 0.25	.X° ± 0°30°	APPD:	MAT'L:		UNITS		SCALE	SHEET	REV
.XX ± 0.13	.XX° ± 0°30°	CHKD:	FINISH:		MM		NONE	1 OF 1	A
.XXX ± 0.05	.XXX° ± 0°30°	DRWN: Kathy-Tan	Q'TY:						

A	ISSUED	Vegas	07/28/09
REV.	ECN NO.	NAME	DATE

A  
B  
C  
D  
E

A  
B  
C  
D  
E

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8