


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Knight	03/10/15'

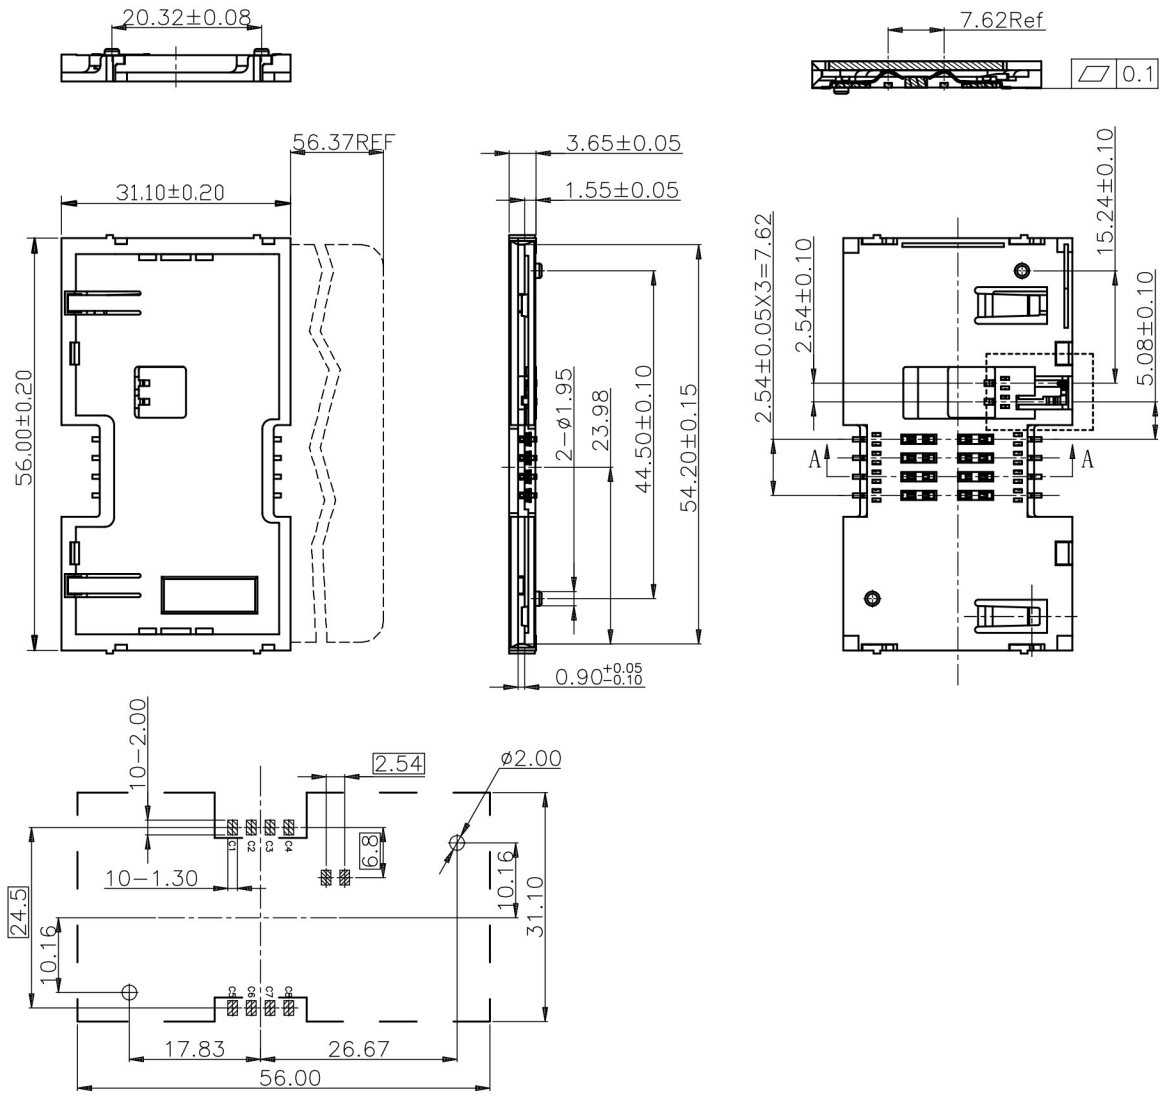


NOTES:

1. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MAX
2. INSULATION RESISTANCE: 1000MΩ MIN
3. CONTACT RESISTANCE: 100mΩ MAX
4. DURABILITY: 10,000 CYCLES
5. CONTACT POSITIVE FORCE: 0.2~0.6N
6. RoHS COMPLIANCE

ORDER INFORMATION

SMCR-86 08 - B K 3 0 T
① ② ③ ④ ⑤ ⑥ ⑦

1. TYPE:
SMCR-86: SMART CARD CONNECTOR
2. POSITIONS:
08: 08 POSITIONS
3. INSULATOR MATERIAL:
B: LCP
4. INSULATOR COLOR:
K: BLACK
5. CONTACT PLATING:
3: GOLD 5u"
6. SHIELD PLATING:
0: NONE SHIELD
7. PACKING
T: TRAY

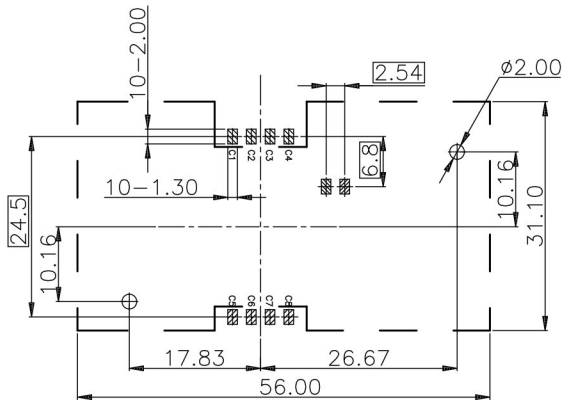

Reference dimension for PCB layout
(TOL:±0.05)

GENERAL TOLERANCE X±0.50 .X±0.38 .XX±0.25 .XXX±0.15	ANGLE TOLERANCE X°±5.0° .X°±3.0° .XX°±2.0° .XXX°±1.0°	DRAWN <i>knighe</i>	DATE 03/10/15'	
MATERIAL SEE BOM		CHECKED	DATE	
FINISH SEE NOTES		APPROVED <i>River</i>		PART NUMBER SMCR-8608-BK30T
SCALE N/A	UNIT mm	DATE 03/10/15'		DRAWING NO. GT26-210429
SHEET 1 OF 1				SIZE A4 REV. A

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	SWITH	1	PHOSPHOR BRONZE, GOLD 5u" MIN. PLATING ON CONTACT AREA, TIN 100u" MIN PLATING SOLDER AREA, NICKEL 50u" MIN UNDER PLATING OVERALL	
2	CONTACT	08	PHOSPHOR BRONZE, GOLD 5u" MIN. PLATING ON CONTACT AREA, TIN 100u" MIN PLATING SOLDER AREA, NICKEL 50u" MIN UNDER PLATING OVERALL	
1	HOUSING	1	LCP	BLACK, UL94 V-0