
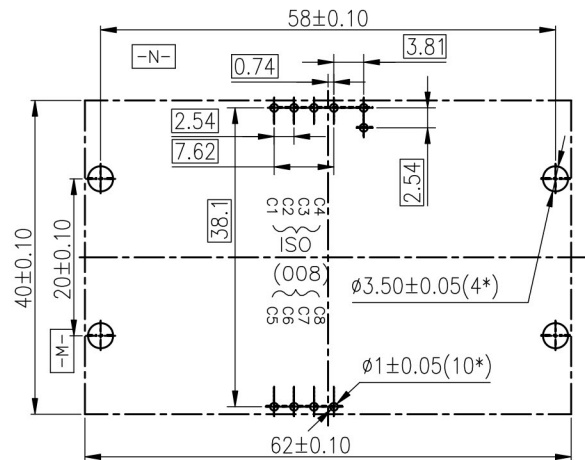
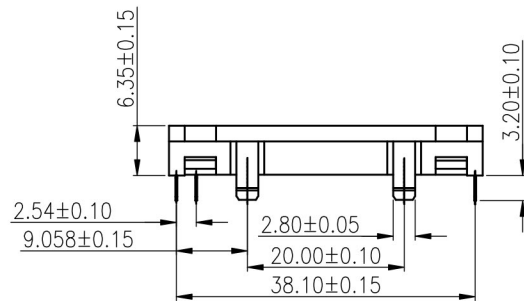
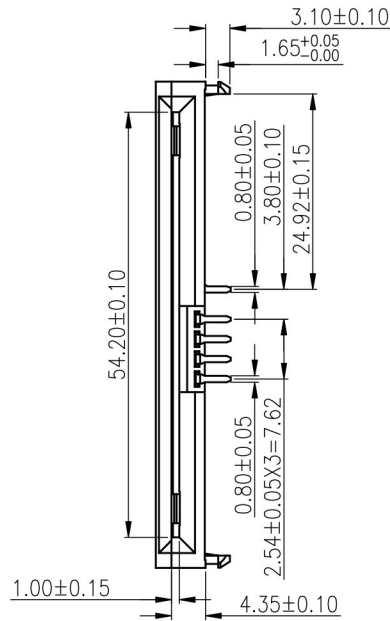


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	KNIGHT	3/11/2015

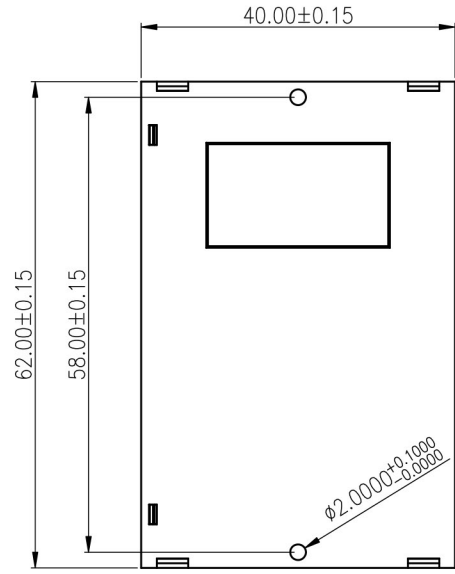

PCB Layout
(Recommend)

NOTES:

- CONTACT CURRENT RATING: 0.5AC/DC
- CONTACT RESISTANCE: 50~100MΩ MAX
- INSULATION RESISTANCE: 500MΩ MIN
- OPERATING TEMPERATURE: -25°C~90°C
- SWITCH TYPE: NORMALLY OPEN
- RoHS Compliance

ORDER INFORMATION

SMCR-8B 08 - A K H S T
① ② ③④⑤⑥⑦

- TYPE:
SMCR-8B: SMART CRAD CONNECTOR
- POSITIONS
08:08 POSITIONS
- INSULATOR MATERIAL:
A: PBT
- INSULATOR COLOR:
K: BLACK
- CONTACT PLATING:
H: GOLD 2u"
- SHIELD PLATING:
S: NONE SHIELD
- PACKING
T: TRAY

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
4	SPRING	1	PHOSPHOR BRONZE,GOLD FLASH MIN PLATIMH CONTACT ARER, TIN 80u" MIN PLATING SOLDER AREA,NICKEL 50u" MIN PLATING UNDER OVERALL	
3	SWITH	1	PHOSPHOR BRONZE,GOLD 2u" MIN PLATIMH CONTACT ARER, TIN 80u" MIN PLATING SOLDER AREA,NICKEL 50u" MIN PLATING UNDER OVERALL	
2	TERMINAL	8	PHOSPHOR BRONZE,GOLD 2u" MIN PLATIMH CONTACT ARER, TIN 80u" MIN PLATING SOLDER AREA,NICKEL 50u" MIN PLATING UNDER OVERALL	
1	HOUSING	1	PBT COLOR:BLACK	UL 94 V-0

GENERAL TOLERANCE .X±0.50 .X±0.38 .XX±0.25 .XXX±0.15	ANGLE TOLERANCE X°± 5.0° .X°± 3.0° .XX°± 2.0° .XXX°± 1.0°	DRAWN <i>knighe</i>	DATE 3/11/15'
MATL SEE BOM	FINISH SEE NOTES	CHECKED	DATE
SCALE N/A	UNIT mm	APPROVED <i>River</i>	DATE 3/11/15'
SHEET 1 OF 1			

TITLE SMART CARD CONNECTOR	
PART NUMBER SMCR-8B08-AKHST	
DRAWING NO. GT26-210436	SIZE A4
REV. A	