
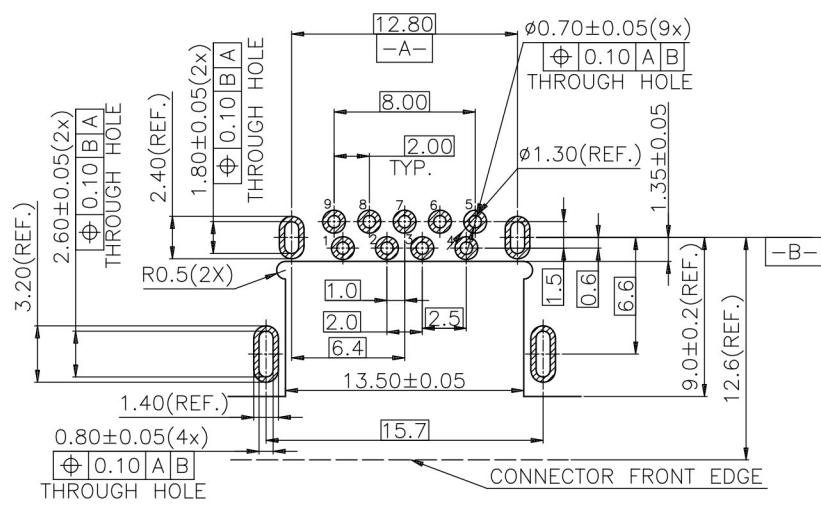
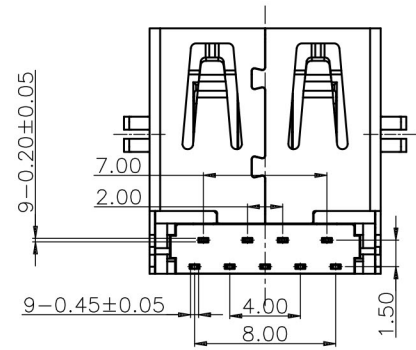
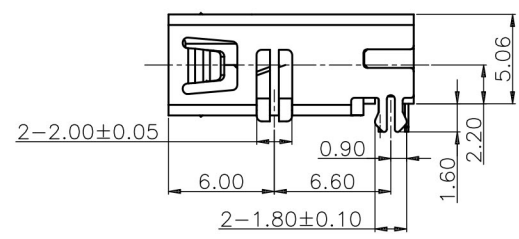
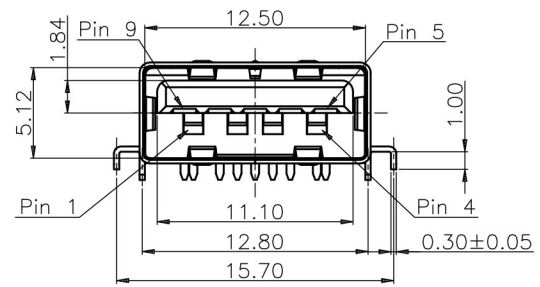
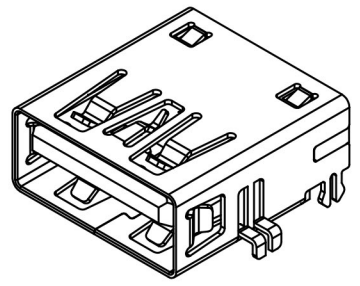


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

| REV. | ECN. NO. | DESCRIPTION | ENG | DATE |
|------|----------|-------------|--------|-----------|
| A | | INITIAL | Knight | 01/27/15' |

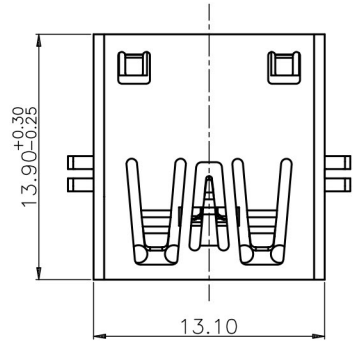

RECOMMENDED P.C.B LAYOUT (THK: 1.2mm)

NOTES:

- CURRENT RATING: 1.5 Amp
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MAX
- INSULATION RESISTANCE: 1000MΩ MIN.
- CONTACT RESISTANCE: 30mΩ MAX.
- INSERTION FORCE : 3.5 KGF MAX
- WITHDRAWAL FORCE : 1.0 KGF MIN
- DURABILITY: 5000 CYCLES
- RoHS COMPLIANCE

ORDER INFORMATION

USAR-6V 09 - F B 1 3 T
① ② ③④⑤⑥⑦

- TYPE:
USAR-6V: USB 3.0 A TYPE Rec.
- POSITIONS:
09: 09 POSITIONS
- INSULATOR MATERIAL:
F: PA9T
- INSULATOR COLOR:
B: BLUE
- CONTACT PLATING:
1: GOLD FLASH
- SHIELD PLATING:
3: NICKEL PLATING
- PACKING
T: TRAY

| ITEM | NAME | Q'TY | DESCRIPTION |
|------|---------|------|---|
| 3 | SHELL | 1 | SUS, NICKEL 80u" MIN PLATING OVERALL |
| 2 | CONTACT | 9 | PHOSPHOR BRONZE, GOLD FLASH PLATING ON CONTACT AREA, TIN 100u" MIN PLATING SOLDER AREA, NICKEL 50u" MIN UNDER PLATING OVERALL |
| 1 | HOUSING | 1 | PA9T |

| |
|---------------------|
| BLUE 300C, UL94 V-0 |
| NOTE |

| | |
|---|---|
| GENERAL TOLERANCE X±0.50 .X±0.38 .XX±0.25 .XXX±0.15 | ANGLE TOLERANCE X°±5.0° .X°±3.0° .XX°±2.0° .XXX°±1.0° |
| MATL SEE BOM | FINISH SEE NOTES |
| SCALE N/A | UNIT mm |
| SHEET 1 OF 1 | UNIT mm |

| | |
|--------------------------|-------------------|
| DRAWN <i>knighe</i> | DATE 01/27/15' |
| CHECKED | DATE |
| APPROVED <i>River</i> | DATE 01/27/15' |

| | |
|---------------------------------|----------------------|
| GENESIS TECHNOLOGY, INC. | |
| TITLE: USB 3.0 A TYPE Rec. | |
| PART NUMBER: USAR-6V09-FB13T | |
| DRAWING NO. GT26-210331 | SIZE A4 REV. A |