

PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Sun	2/13/15'
B		ADD ORDER INFORMATION CONTENT	Knight	3/02/15'
C		MODIFY ORDER INFORMATION	Knight	3/04/15'
D		ADD DIMENSION	Knight	11/18/15'
E		CORRECT ILLUSTRATION	AXL	2/5/16'

NOTES

ELECTRICAL:

- CONTACT CURRENT RATING: 1.5A
- CONTACT RESISTANCE: TERMINAL 30 MILIOHMS MAX
- WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- INSULATION RESISTANCE: 1000 MOHM MIN

MECHANICAL:

- INSERTION FORCE: 3.5Kgf MAX
- WITHDRAWAL FROCE: 1.0~3.5Kgf
- DURABILITY: 1500 CYCLES
- OPERATING TEMPERATURE: 0°C~+50°C
- ROHS 6/6 COMPLIANT


ORDER INFORMATION

USAW-10 08-A K 1 3 U
① ② ③ ④ ⑤ ⑥ ⑦

- TYPE:
USAW-10: USB 2.0 ADUAL-WAY
PLUG MID-PCB TYPE
- POSITIONS:
08: 08 POSITIONS

INSULATOR MATERIAL:

- A: PBT
- INSULATOR COLOR:
K: BLACK
- CONTACT PLATING:
1: GOLD FLASH
- SHIELD PLATING:
3: NICKEL PLATING
- PACKING
U: TUBE

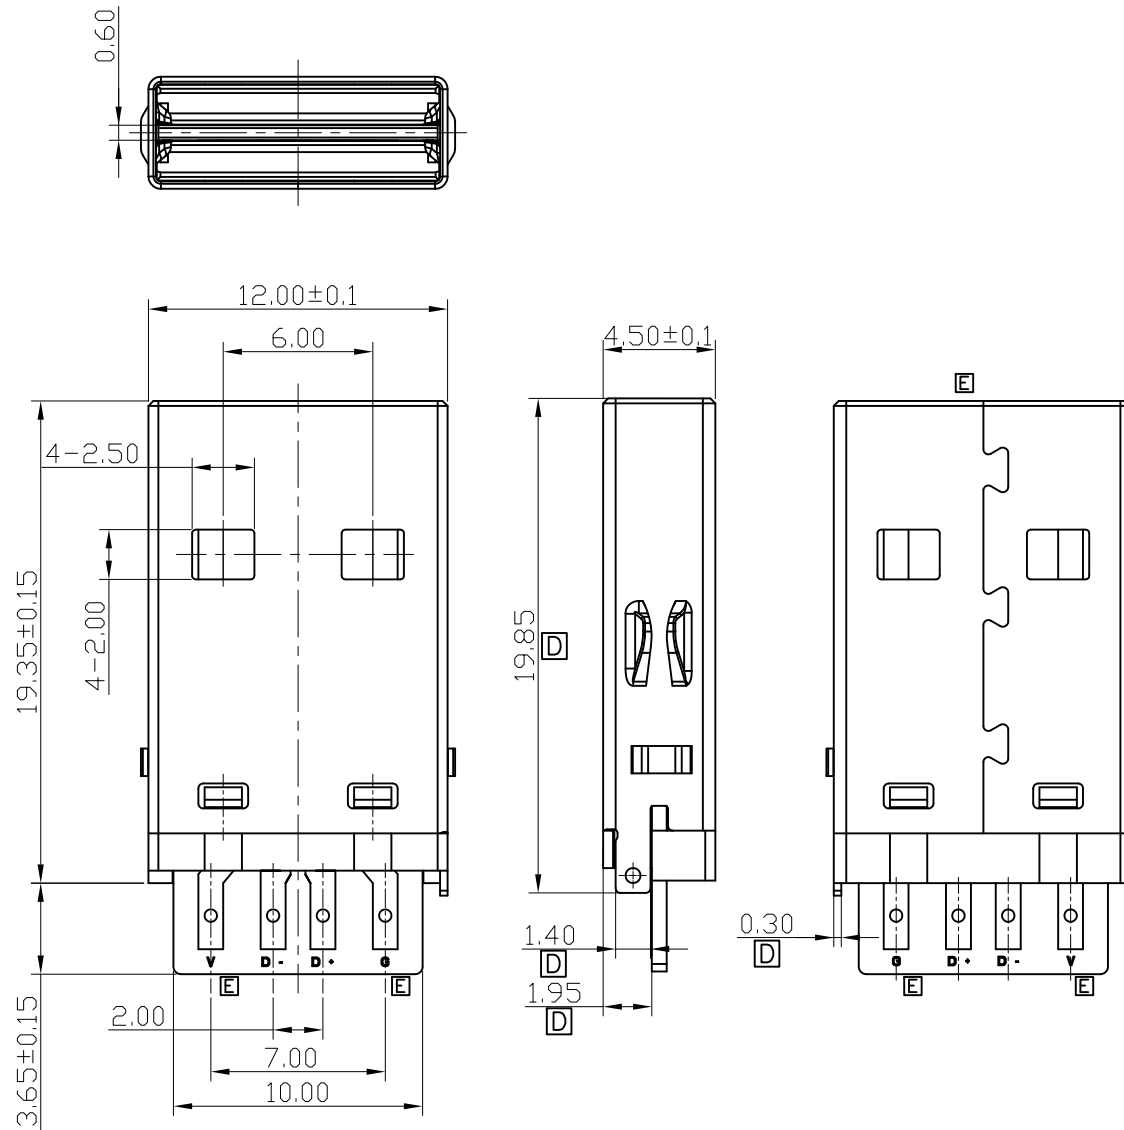

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWN	DATE	
X.±0.50 .X±0.38 .XX±0.25 .XXX±0.15	X°± 5.0° .X°± 3.0° .XX°± 2.0° .XXX°± 1.0°	AXL	2/5/16'	
MATL	SEE BOM	CHECKED	DATE	PART NUMBER: USAW-1008-AK13U
FINISH	SEE NOTES	APPROVED	DATE	DRAWING NO. GT26-210413
SCALE	N/A			SIZE A4
SHEET	1 OF 1			REV. E

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	TERMINAL	8	FR-4, ORDER INFORMATION [B]	
2	SHELL	1	SPCC,NICKEL 100u" MIN PLATING OVERALL [B]	
1	HOUSING	1	PBT+30%G.F.[B][C]	BLACK,UL94V-0