


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		ISSUED	KYLE	6/8/2018
X2		update length options	KYLE	11/13/2018

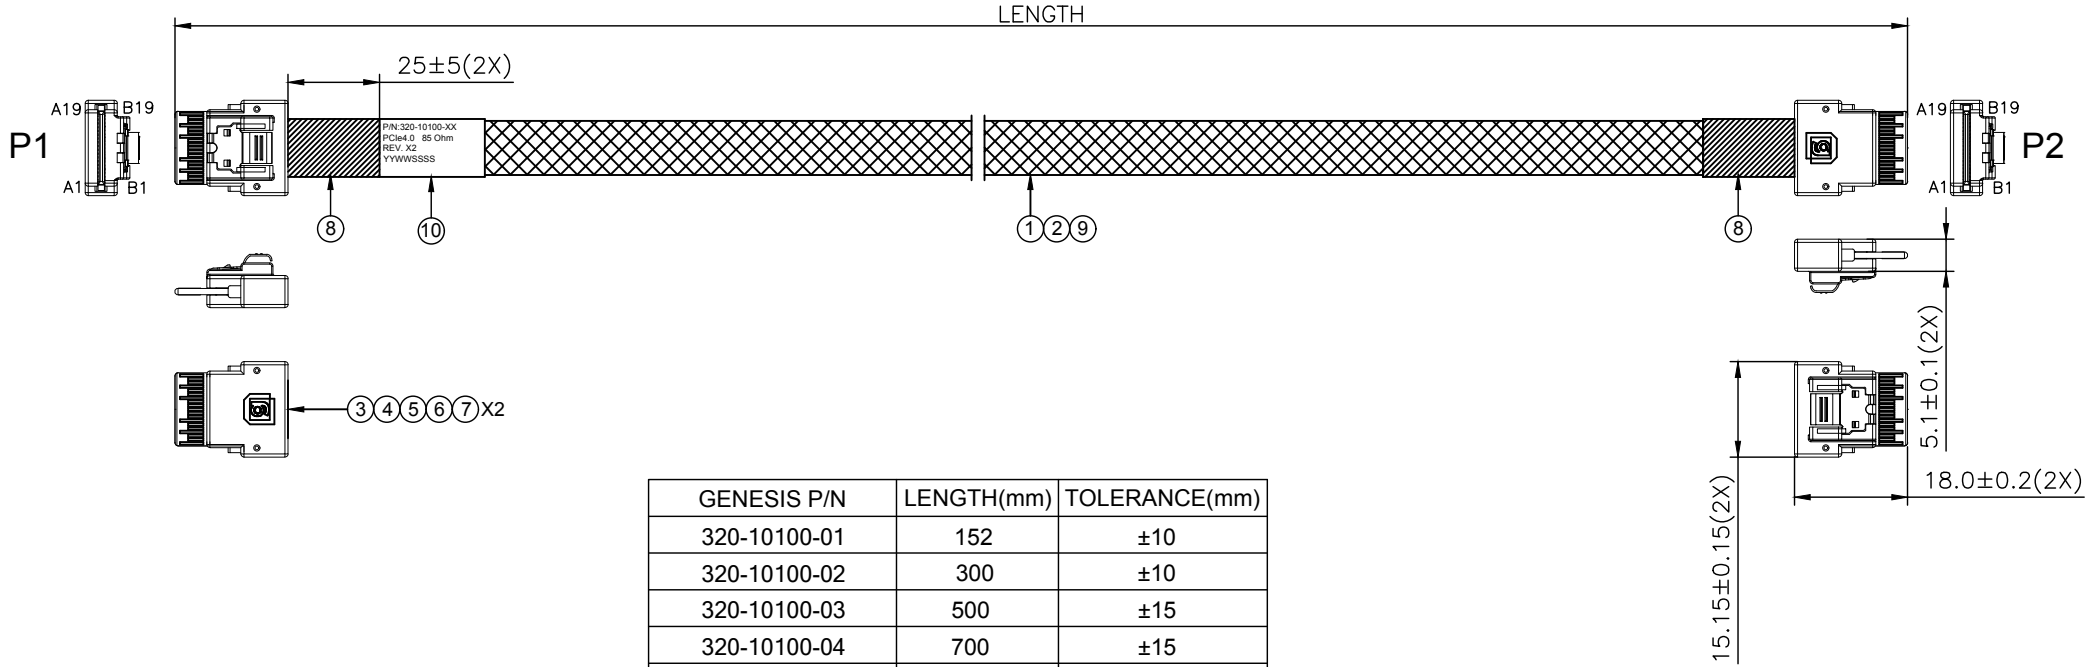



11	DUST CAP	2	DUST CAP FOR SFF-8654 4i, PE, NATURAL	
10	LABEL	1	WHITE LABEL, 60*30MM(REF)	
9	WEAVE	A/R	PLASTIC BRAID SLEEVE, PET, BLACK,OD:8.0MM	
8	ACETATE TAPE	A/R	ACETATE TAPE, W=25MM, BLACK	
7	RIVET	4	RIVET FOR SFF-8654	
6	LATCH	2	LATCH FOR SFF-8654	
5	HOUSING	2	HOUSING FOR SFF-8654 4i STR, BLACK	
4	INNER MOLD	2	INNER MOLDING FOR SFF-8654 4i STR, BLACK	
3	8654 4i PCB	2	PCB FOR SLIMLINE SAS 4i STR, AU30u"	
2	FLAT CABLE	A/R	FLAT CABLE 32AWG*5C, RED/BLACK	
1	SAS CABLE	A/R	PCIe4.0 CABLE: UL20744 (32AWG*2C+2D)+AM, BLUE, 85 Ohm	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

GENERAL TOLERANCE X ± .X ± 0.40 .XX ± 0.30 .XXX ± 0.20		ANGLE TOLERANCE X° ± 5.0° .X° ± 3.0° .XX° ± 2.0° .XXX° ± 1.0°		DRAWN KYLE	DATE 11/13/2018	 genesis connected solutions	
MATL SEE BOM		FINISH SEE BOM		CHECKED	DATE		
SCALE N/A		UNIT mm		APPROVED		DATE	TITLE SlimSAS 4i STR Cable Ass'y PCIe4.0 85 Ohm
SHEET 1 OF 2							PART NUMBER 320-10100-XX
							DRAWING NO. 320-10100
							SIZE A4
							REV. X2

RoHS Compliant

WIRING TABLE

LABEL INFORMATION

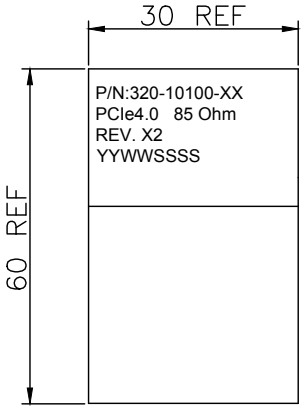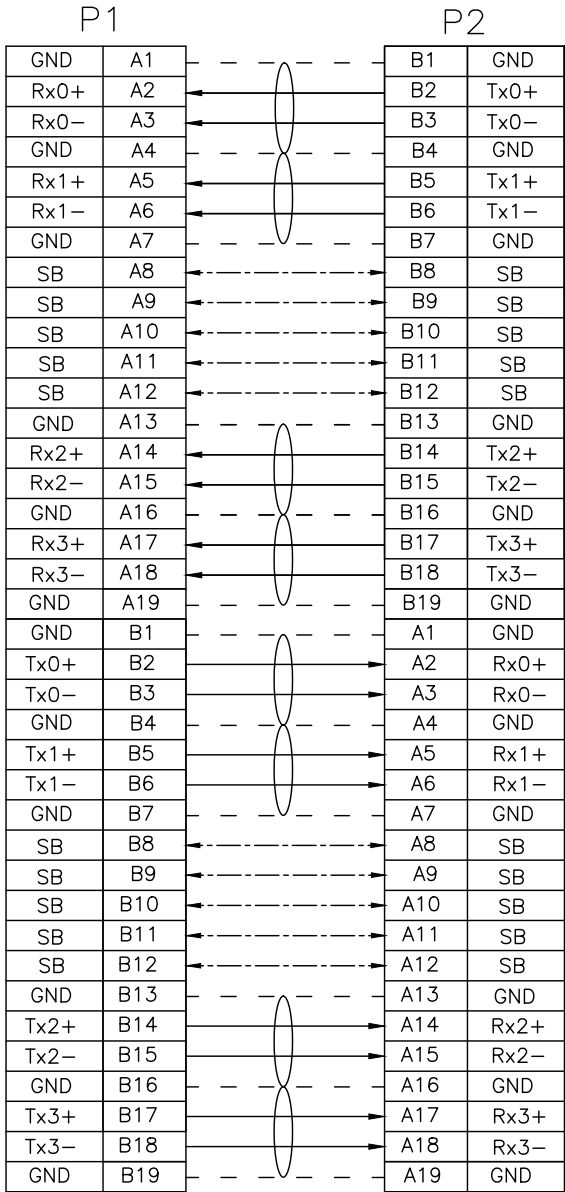

FONT: ARIAL
HEIGHT: 2.0mm Min

- TEST CONDITIONS:
1. 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
 2. CONDUCTIVE RESISTANCE: 3Ω MAX.
 3. INSULATION RESISTANCE: 10 MΩ
 4. HI-POT TEST: 300VDC FOR 10ms.
 5. THIS PRODUCT MEETS PCIe 4.0

RoHS Compliant

GENERAL TOLERANCE X ± .X ± 0.40 .XX ± 0.30 .XXX ± 0.20		ANGLE TOLERANCE X° ± 5.0° .X° ± 3.0° .XX° ± 2.0° .XXX° ± 1.0°		DRAWN KYLE 11/13/2018		 genesis connected solutions		TITLE. SlimSAS 4i STR Cable Ass'Y PCIe4.0 85 Ohm	
MATERIAL SEE BOM		FINISH SEE BOM		CHECKED DATE				PART NUMBER. 320-10100-XX	
SCALE N/A		UNIT mm		APPROVED DATE		DRAWING NO. 320-10100		SIZE A4 REV. X2	
SHEET 2 OF 2									

P1 & P2: A1,A4,A7,A13,A16,A19,B1,B4,B7,B13,B16,B19 Grounded on PCB