


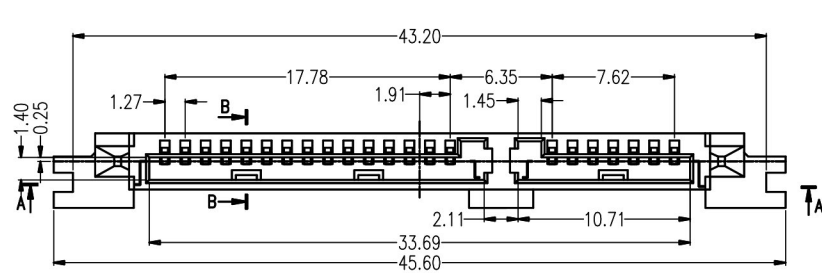


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL



REV	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Knight	09/22/14'

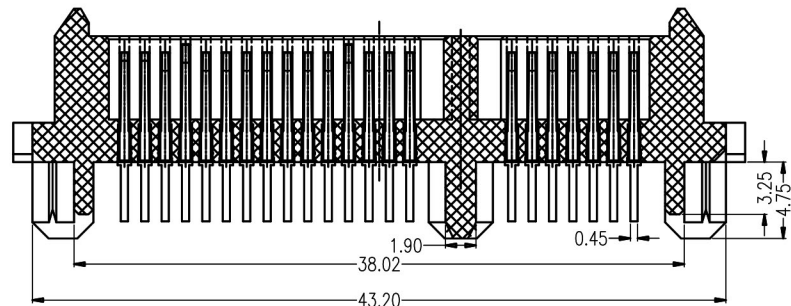

SECT B-B

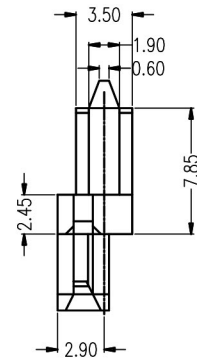

SECT A-A

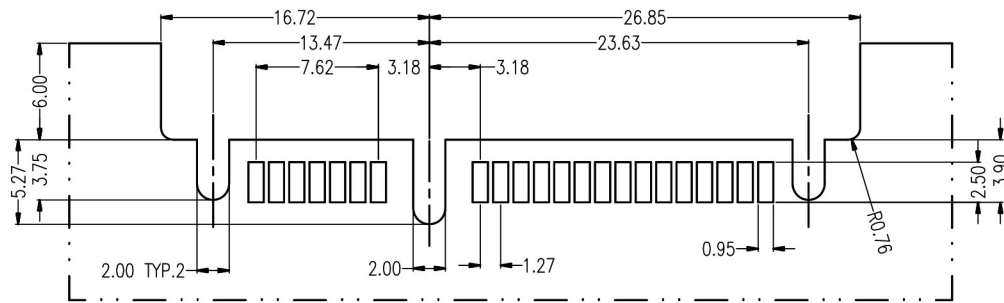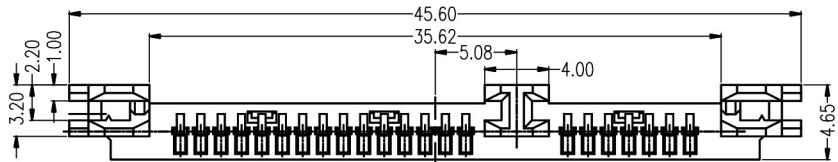

Straddle P.C.B. Layout(T=1.0mm)

NOTES:

- 1.Operation Voltage: 100VAC Max.
- 2.Current Rating: 1.5 Ampere Per Contact.
- 3.Contact Resistance:30 Milliohms Max.
- 4.Insulation Resistane:1000 Megohms Min.
- 5.Dielectric Withstanding Voltage: 500 VAC.
- 6.Operating Temperature:-55°C to +125°C

ORDER INFORMATION:

SATR-4A22-B K 5 0 U
① ② ③ ④ ⑤ ⑥ ⑦

1.TYPE:

SATR-4A:SATA 7+15P Sandard Straddle Type(1.0mm)Female

2.POSITIONS:

22: 22POSITIONS

3.INSULATOR MATERIAL:

B:LCP

4.INSULATOR COLOR:

K:BLACK

5.CONTACT PLATING:

5:GOLD 15u"

6.SHIELD PLATING:

0:NONE SHIELD

7.PACKING

U:TUBE

2	CANTACT	22	PHOSPHOR BRONZE, Au 15u" PLATING ON CONTACT AREA,TIN 100u" MIN PLATING ON SOLDER AREA,NICKEL 40u" MIN UNDER PLATING OVERALL
1	HOUSING	1	LCP
ITEM	NAME	Q'TY	DESCRIPTION
1			
2			
3			
4			
5			

BLACK, UL94 V-0	SCALE N/A	UNIT mm
NOTE	SHEET 1 OF 1	

DRAWN	DATE
<i>knighe</i>	09/22/14'
CHECKED	DATE
APPROVED	DATE
<i>River</i>	09/22/14'

GENESIS TECHNOLOGY, INC	
TITLE: SATA 7+15P Sandard Straddle Type(1.0mm) Female	
PART NUMBER: SATR-4A22-BK50U	
DRAWING NO.	SIZE A4
GT23-210219	REV. A