



PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		ISSUED	KYLE	6/11/2018
X2		CHANGE HOUSINGS, UPDATE LENGTHS	KYLE	10/18/2018
X3		UPDATE WIRE GAUGE	KYLE	3/6/2019

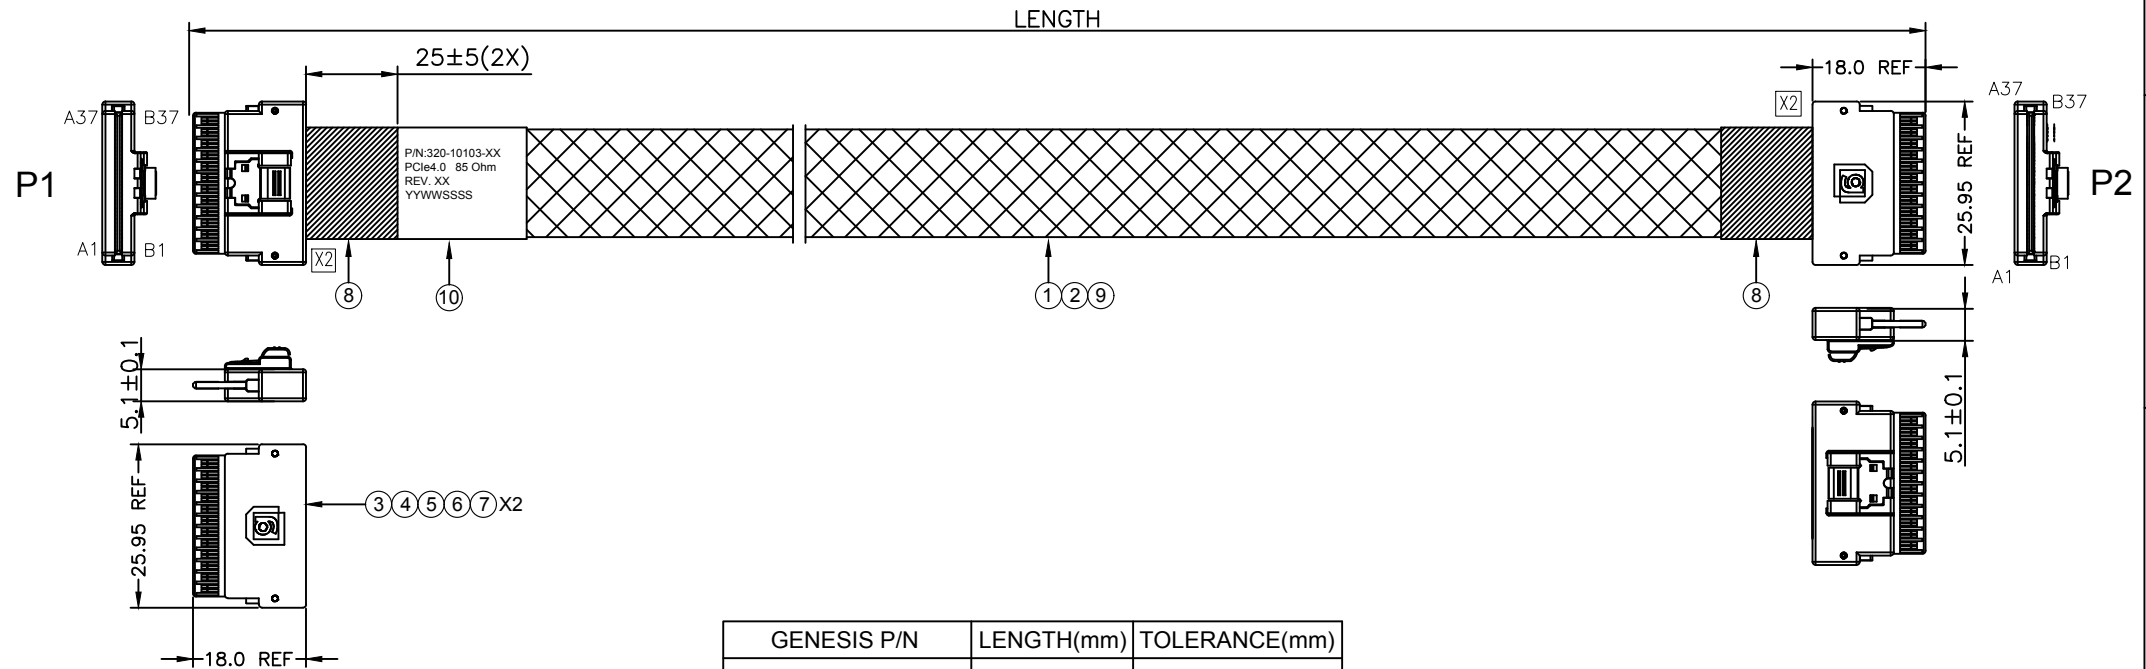

GENESIS P/N	LENGTH(mm)	TOLERANCE(mm)
320-10103-01	152	±10
320-10103-02	300	±10
320-10103-03	500	±15
320-10103-04	700	±15
320-10103-05	1000	±15




ITEM	NAME	Q'TY	DESCRIPTION	NOTE
11	DUST CAP	2	DUST CAP FOR SFF-8654 8i, PE, NATURAL	
10	LABEL	1	WHITE LABEL, 60*30MM(REF)	
9	WEAVE	A/R	PLASTIC BRAID SLEEVE, PET, BLACK,OD:10.0MM	
8	ACETATE TAPE	A/R	ACETATE TAPE, W=25MM, BLACK	
7	RIVET	4	RIVET FOR SFF-8654	
6	LATCH	2	LATCH FOR SFF-8654	
5	HOUSING	2	HOUSING FOR SFF-8654 8i STR, BLACK	
4	INNER MOLD	2	INNER MOLDING FOR SFF-8654 8i STR, BLACK	
3	8654 8i PCB	2	PCB FOR SLIMLINE SAS 8i STR, AU30u"	
2	FLAT CABLE	A/R	FLAT CABLE 32AWG*5C, RED/BLACK [X3]	
1	SAS CABLE	A/R	PCIe4.0 CABLE 16G 32AWG [X3]	


RoHS Compliant

GENERAL TOLERANCE X ± .X ± 0.40 .XX ± 0.30 .XXX ± 0.20	ANGLE TOLERANCE X° ± 5.0° .X° ± 3.0° .XX° ± 2.0° .XXX° ± 1.0°	DRAWN KYLE	DATE 3/6/2019	
MATL SEE BOM		CHECKED	DATE	
FINISH SEE BOM		APPROVED		PART NUMBER 320-10103-XX
SCALE N/A	UNIT mm			DRAWING NO. 320-10103
SHEET 1 OF 2				SIZE A4 REV. X3


WIRING TABLE

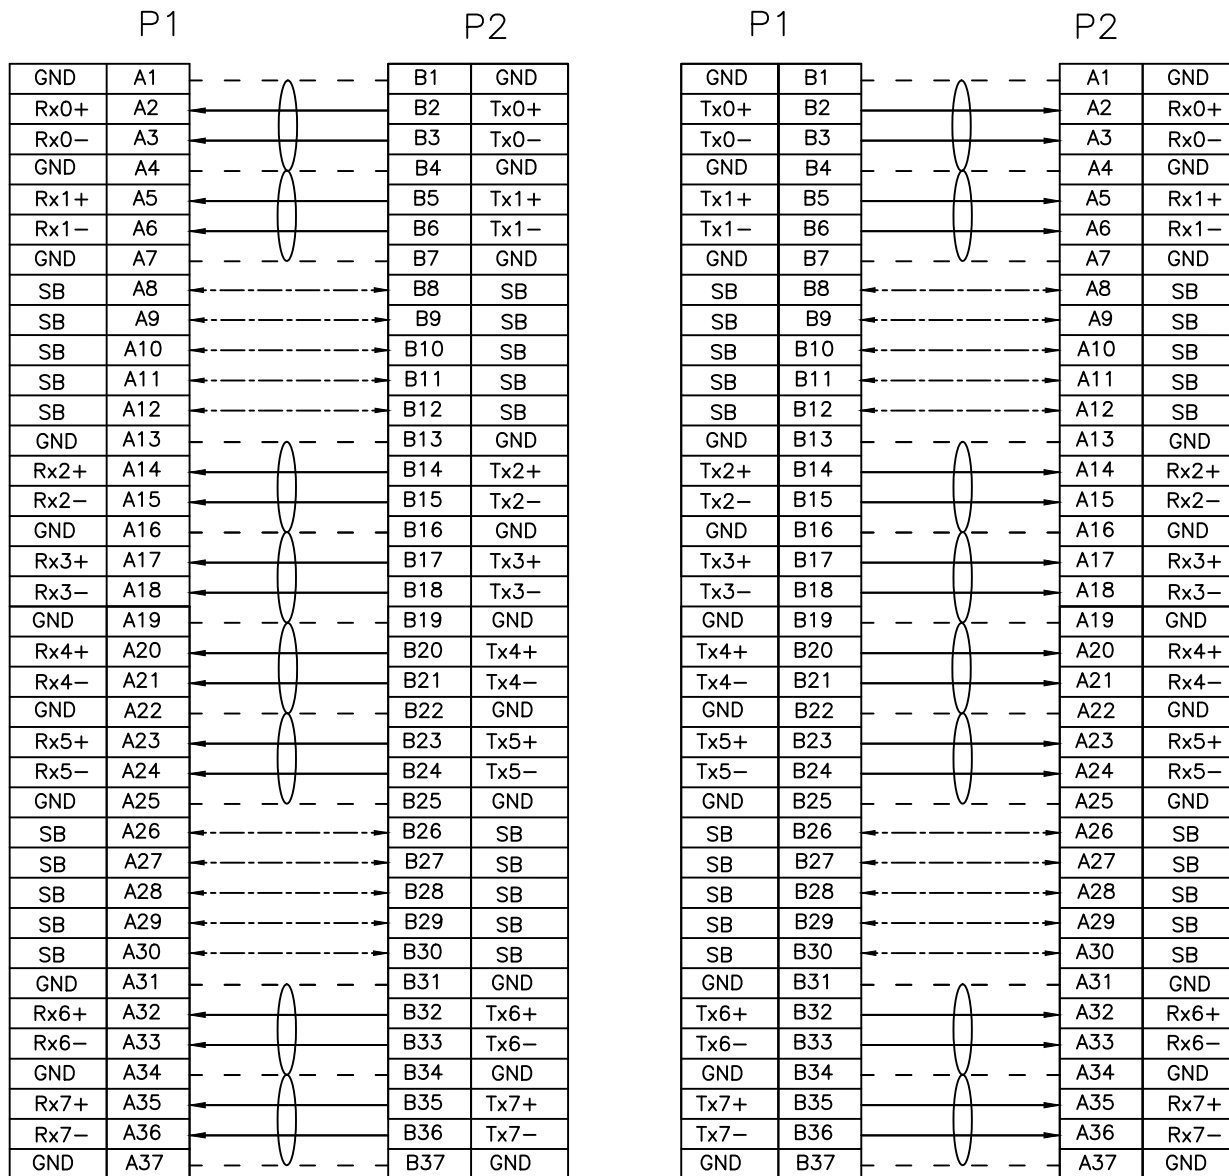

A1,A4,A7,A13,A16,A19,A22,A25,A31,A34,A37,
B1,B4,B7,B13,B16,B19,B22,B25,B31,B34,B37 Grounded on PCB



LABEL INFORMATION

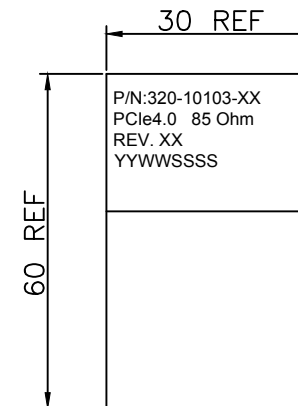

FONT: ARIAL
HEIGHT: 2.0mm Min

TEST CONDITIONS:

- 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
- CONDUCTIVE RESISTANCE: 3Ω MAX.
- INSULATION RESISTANCE: 10 MΩ
- HI-POT TEST: 300VDC FOR 10ms.
- THIS PRODUCT MEETS PCIe 4.0

RoHS Compliant

GENERAL TOLERANCE X ± .X ± 0.40 .XX ± 0.30 .XXX ± 0.20	ANGLE TOLERANCE X° ± 5.0° .X° ± 3.0° .XX° ± 2.0° .XXX° ± 1.0°	DRAWN KYLE	DATE 3/6/2019	
MATL SEE BOM	FINISH SEE BOM	CHECKED	DATE	
SCALE N/A	UNIT mm	APPROVED	DATE	PART NUMBER 320-10103-XX
SHEET 2 OF 2				DRAWING NO. 320-10103
				SIZE A4 REV. X3