
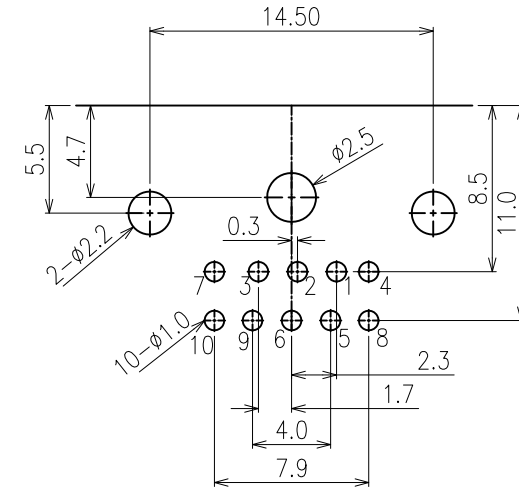


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		INITIAL	Jeff	09/20/12'
X2		REVISED PLATING THICKNESS	Jeff	10/11/12'
X3		UPDATE DRAWING	Jesse	07/04/13'

NOTES:

- CURRENT RATING: 2A MAX.
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 100MΩ MIN. AT 250V DC
- DIELECTRIC WITHSTANDING VOLTAGE: 250V AC / 1 MINUTE
5. OPERATING TEMPERATURE: -25°C TO +90°C
- RoHS 6/6 COMPLIANT

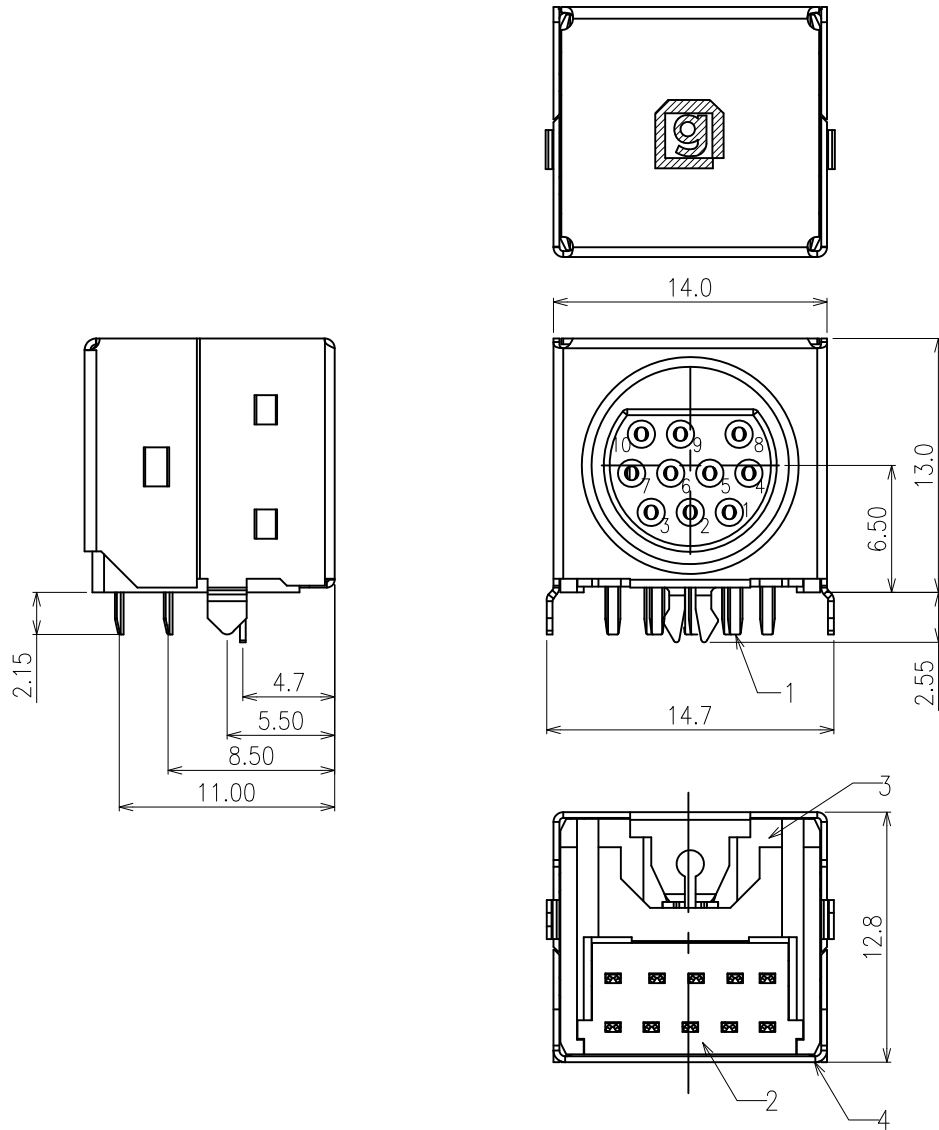

PCB LAYOUT  
(BOTTOM VIEW)  
RECOMMENDED TOLERANCE: ±0.05

ITEM	NAME	Q'TY	DESCRIPTION	MATERIAL	FINISH / COLOR	NOTE
4	SHELL	1		BRASS	CuSn 2um PLATING	
3	HOUSING	1		PBT+15%G.F.	COLOR BLACK	UL 94V-0
2	COVER	1		PBT+15%G.F.	COLOR BLACK	UL 94V-0
1	TERMINAL	10		PHOSPHOR BRONZE	Ag 0.2um PLATING OVER Ni 1.25um UNDERPLATING	

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWN	DATE	
X.±	X°±	Jesse	07/04/13'	
.X± 0.38	.X°±	DESIGN	DATE	TITLE.
.XX± 0.25	.XX°±	CHECKED	DATE	10PIN MINI DIN JACK RIGHT ANGLE
.XXX± 0.15	.XXX°±	APPROVED	DATE	PART NUMBER.
				GT17-200303
MATL SEE BOM				DRAWING NO.
FINISH SEE NOTES				GT17-200303
SCALE N/A	UNIT mm			SIZE A4
SHEET 1 OF 1				REV. X3