
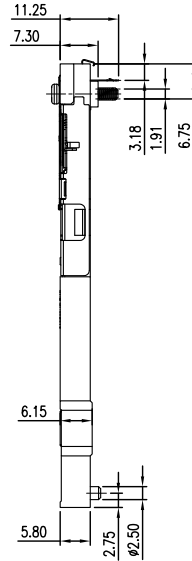


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		ISSUED	DANIEL	12/01/14'
X2		REVISED SHIELD PLATING	DANIEL	12/04/14'
X3		REVISED SHIELD	DANIEL	12/19/14'

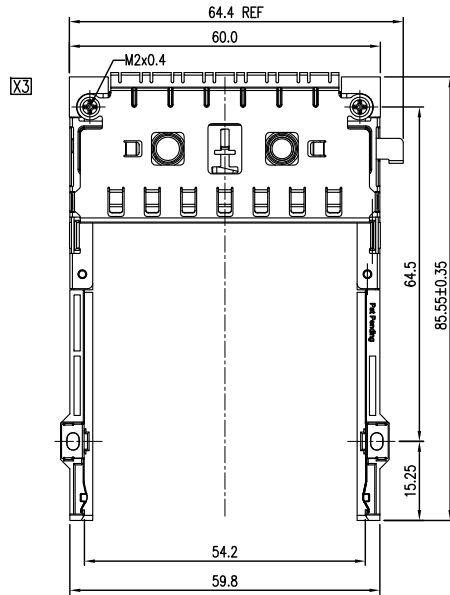


NOTES:

- MATERIALS:
HOUSING: PBT+30% G.F. UL94V-0, COLOR: BLACK
CONTACTS: COPPER ALLOY
- FINISH:
CONTACTS: GOLD PLATED OPTIONAL (SEE PART. NUMBER)
PLATE NICKEL 50u" MIN OVER ALL SURFACE
- MATES WITH PCMR-1068 SERIES
- RECOMMENDED SCREW TORQUE : 1.8 kgf.cm Max.
- RoHS 6/6 COMPLIANT.

PART. NUMBER

PCMR-2W 68 - A K * S I
① ② ③④⑤⑥⑦

- ① CONNECTOR:
PCMR-2W: 68PIN PCMCIA, SOCKET
- ② POSITION:
68: 68 POSITIONS
- ③ INSULATOR MATERIAL:
A: PBT
- ④ INSULATOR COLOR:
K: BLACK
- ⑤ CONTACT PLATING:
1: GOLD FLASH
- ⑥ SHIELD PLATING
S: WITHOUT PLATING
- ⑦ PACKING
T: TRAY

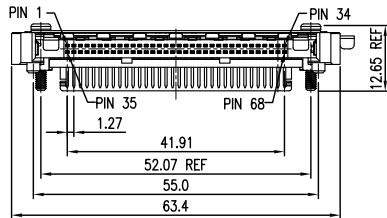

PIN TYPE	PIN NUMBER
DETECT: 3.50mm	36&67
GENERAL: 4.25mm	THE REST
POWER: 5.00mm	1&17&34&35&51&68

GENERAL TOLERANCE X.± 0.50 .X± 0.38 .XX± 0.25 .XXX± 0.15	ANGLE TOLERANCE X°± 5.0° .X°± 3.0° .XX°± 2.0° .XXX°± 1.0°	DRAWN DANIEL	DATE 12/01/14'	 TITLE: 68PIN PCMCIA SOCKET WITH SHIELD PART NUMBER: PCMR-2W68-AKXST
MATL SEE BOM	FINISH SEE NOTES	CHECKED	DATE	
SCALE N/A	UNIT mm	APPROVED	DATE	
SHEET 1 OF 1				