



PROPRIETARY INFORMATION  
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		ISSUED	TIM	01/17/18
X2		UPDATE 8i HOUSING	KYLE	01/23/20
X3		UPDATE 4i HOUSING W/ LOGO	AXL	09/17/20

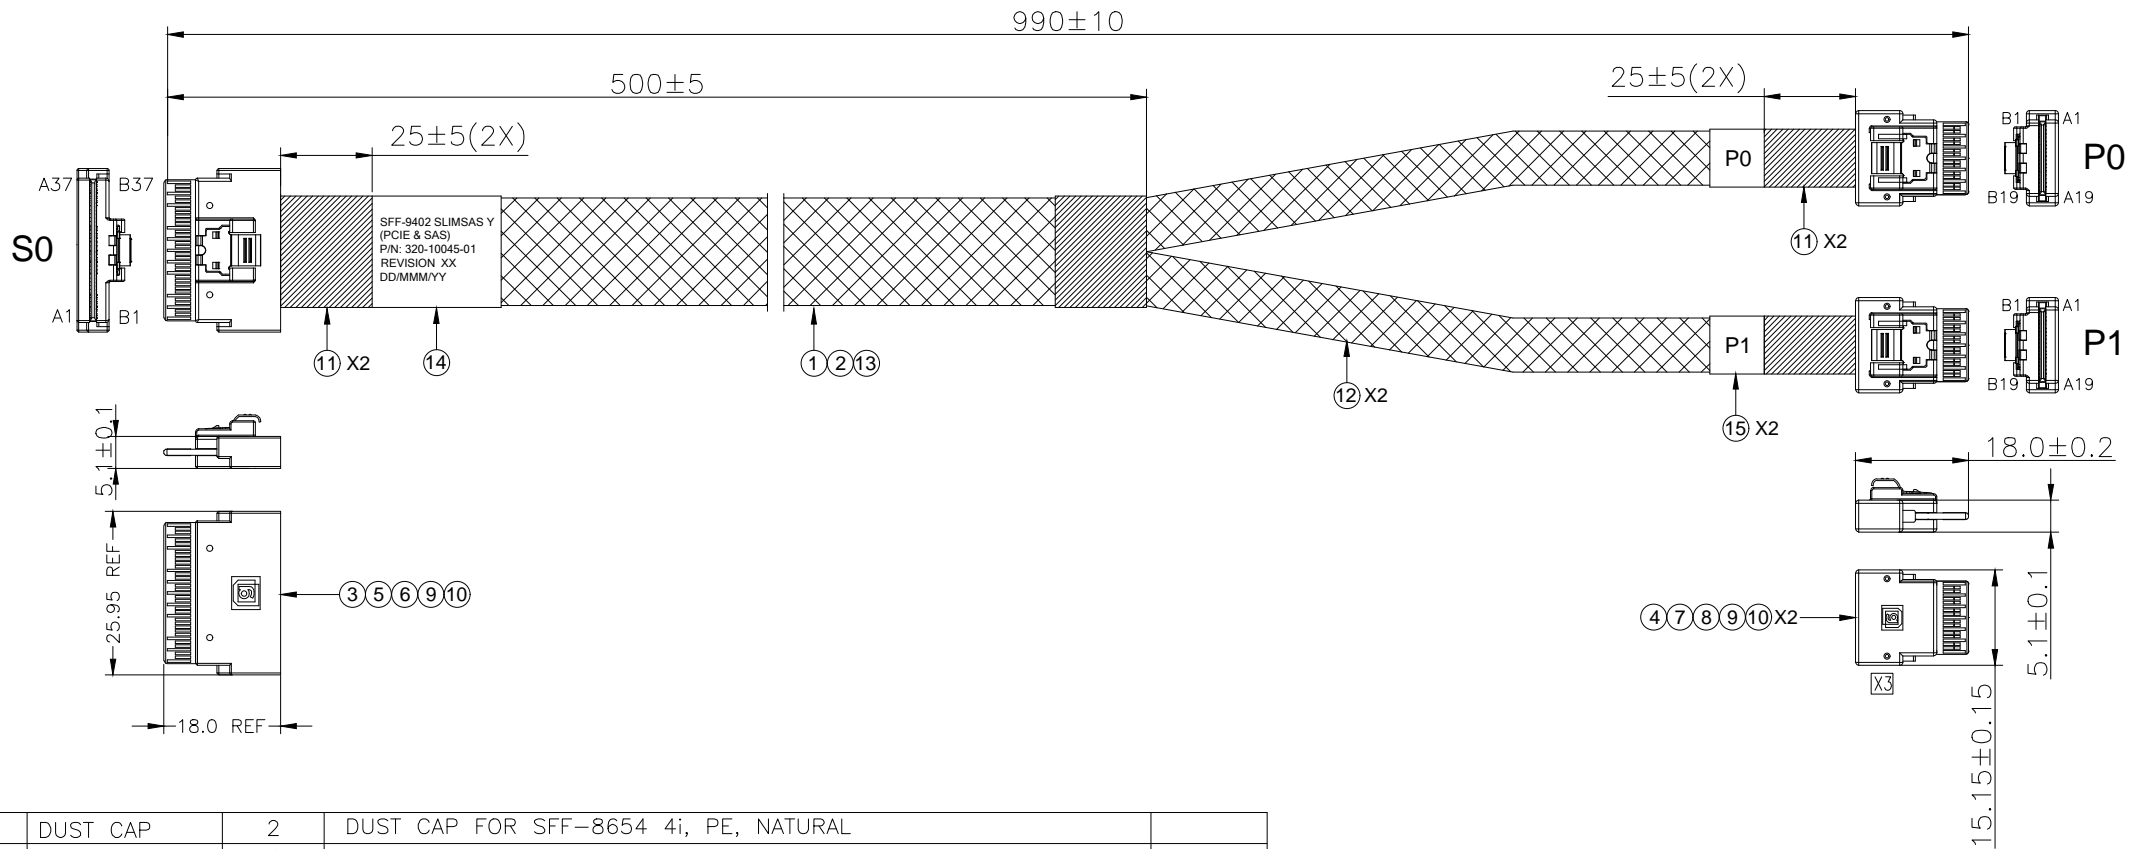



17	DUST CAP	2	DUST CAP FOR SFF-8654 4i, PE, NATURAL	
16	DUST CAP	1	DUST CAP FOR SFF-8654 8i, PE, NATURAL	
15	LABEL	2	WHITE LABEL, 40*10MM(REF)	
14	LABEL	1	WHITE LABEL, 60*30MM(REF)	
13	WEAVE	A/R	PLASTIC BRAID SLEEVE, PET, GREEN,OD:10.0MM	
12	WEAVE	A/R	PLASTIC BRAID SLEEVE, PET, GREEN,OD:8.0MM	
11	ACETATE TAPE	A/R	ACETATE TAPE, W=25MM, BLACK	
10	RIVET	6	RIVET FOR SFF-8654	
9	LATCH	3	LATCH FOR SFF-8654	
8	HOUSING	2	HOUSING FOR SFF-8654 4i STR, BLACK	
7	INNER MOLD	2	INNER MOLDING FOR SFF-8654 4i STR, BLACK	
6	HOUSING	1	HOUSING FOR SFF-8654 8i STR, BLACK	
5	INNER MOLD	1	INNER MOLDING FOR SFF-8654 8i STR, BLACK	
4	8654 4i PCB	2	PCB FOR SLIMLINE SAS 4i STR, AU30u"	
3	8654 8i PCB	1	PCB FOR SLIMLINE SAS 8i STR, AU30u"	
2	WIRE	A/R	UL1571, 32AWG, PVC	
1	SAS CABLE	A/R	SAS CABLE: UL20744 32AWG 85ohm,SAS 4.0 & PCIE GEN4,VW-1	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE



GENERAL TOLERANCE		ANGLE TOLERANCE		DRAWN	DATE	RoHS Compliant		
X ±	X° ± 5.0°	X ±	X° ± 5.0°	TIM	2018.01.17			
.X ± 0.40	.X° ± 3.0°	.X ± 0.40	.X° ± 3.0°	CHECKED	DATE			
.XX ± 0.30	.XX° ± 2.0°	.XX ± 0.30	.XX° ± 2.0°	EASON	2018.01.17	TITLE:	CABLE, SFF-8654 X8 TO 2X SFF-8654 X4, 1M	
.XXX ± 0.20	.XXX° ± 1.0°	.XXX ± 0.20	.XXX° ± 1.0°	APPROVED	DATE	PART NUMBER:	320-10045-01	
MATL	SEE BOM	SCALE	N/A	UNIT	mm	DRAWING NO.	320-10045	
FINISH	SEE BOM	SHEET	1	OF	2	SIZE	A4	
MIKE						2018.01.17	REV.	X3

### WIRING TABLE

### LABEL INFORMATION

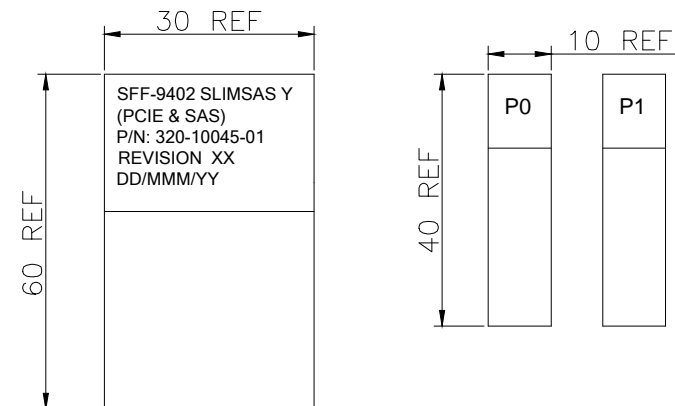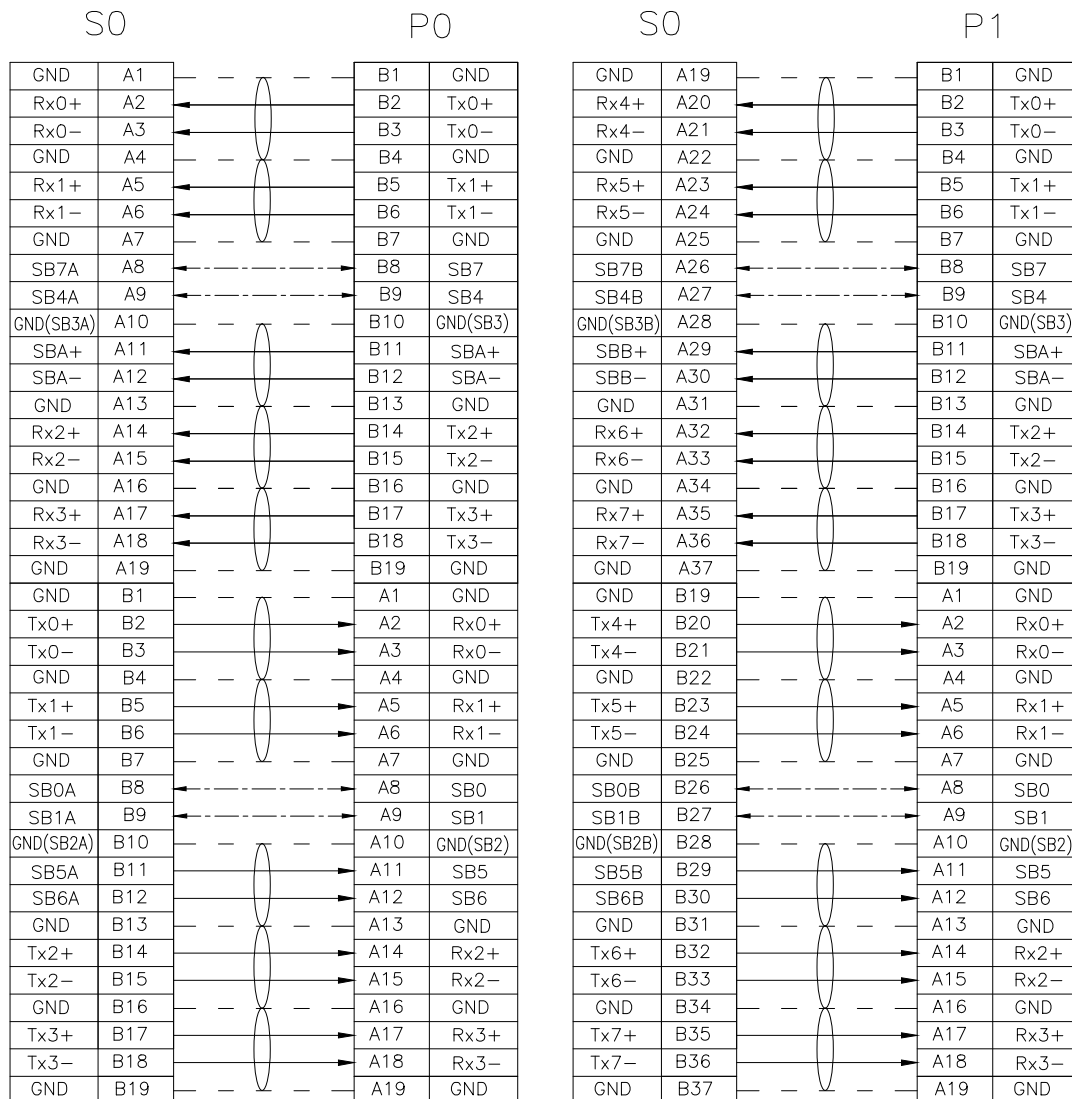


FONT: ARIAL  
HEIGHT: 2.0mm Min

- TEST CONDITIONS:
- 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
  - CONDUCTIVE RESISTANCE: 3Ω MAX.
  - INSULATION RESISTANCE: 10 MΩ
  - HI-POT TEST: 300VDC FOR 10ms.
  - THIS PRODUCT MEETS SAS 4.0 & PCIE GEN 4.

RoHS Compliant

S0: A1,A4,A7,A13,A16,A19,A22,A25,A31,A34,A37,B1,B4,B7,B13,B16,B19,B22,B25,B31,B34,B37 Grounded on PCB  
P0 & P1: A1,A4,A7,A13,A16,A19,B1,B4,B7,B13,B16,B19 Grounded on PCB



GENERAL TOLERANCE X ± .X ± 0.40 .XX ± 0.30 .XXX ± 0.20	ANGLE TOLERANCE X° ± 5.0° .X° ± 3.0° .XX° ± 2.0° .XXX° ± 1.0°	DRAWN TIM	DATE 2018.01.17		TITLE CABLE, SFF-8654 X8 TO 2X SFF-8654 X4, 1M
MATL SEE BOM	FINISH SEE BOM	CHECKED EASON	DATE 2018.01.17		PART NUMBER 320-10045-01
SCALE N/A	UNIT mm	APPROVED MIKE	DATE 2018.01.17	DRAWING NO. 320-10045	SIZE A4 REV. X3
SHEET 2 OF 2					