

- NOTE(注释):**
- CABLE ASSEMBLY IMPEDANCE: 100±10 ohm.**
成品特性阻抗: 100±10 欧姆
 - 100% CONDUCTOR TEST, TEST CONDITION:VOLTAGE 5V,INSULTION RESISTANCE 10M ohm, CONDUCTION RESISTANCE MAX 3 ohm**
100% 导通测试, 测试条件为电压5V, 绝缘10M欧姆, 导通电阻不大于3欧姆
 - HIGH-FREQUENCY TEST ACCORDING TO IEEE802.3 STANDARD.**
高频测试依照IEEE802.3标准测试
 - ALL MATERIAL MUST COMPLY WITH ROHS2.0.**
所有物料必须符合ROHS2.0

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
7	DUST COVER	2	DUST COVER FOR DSFP, PE, NATURAL	
6	SHELL	2	SHELL BARCODE LABELS	
5	MOLDING	2	INNER MOLDING FOR DSFP	
4	STRAIN RELIEF	2	CABLE SR FOR DSFP	
3	PCB	2	DSFP PCB	
2	CONNECTOR	2	DSFP CONNECTOR	
1	CABLE	A/R	TABLE A, WIRE TYPE, WIRE GAUGE	

GENERAL TOLERANCE X.± .X±0.40 .XX±0.30 .XXX±0.20	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±
MATERIAL FINISH	
SCALE N/A	UNIT mm
SHEET 1 OF 3	

DRAWN	DATE
DESIGN	DATE
CHECKED	DATE
APPROVED	DATE



genesis
connected solutions

TITLE: DSFP-DSFP DAC, 56G, 100G

PART NUMBER: 320-10538-XX

DRAWING NO. 320-10538

SIZE A4
REV. X1

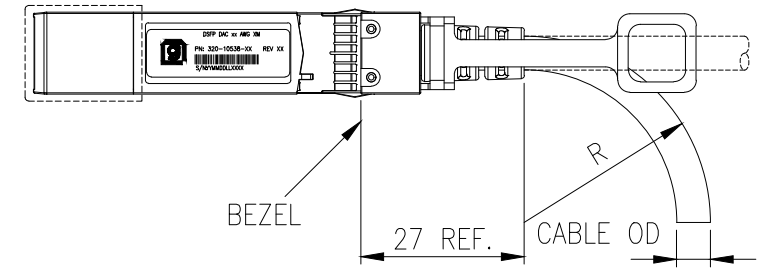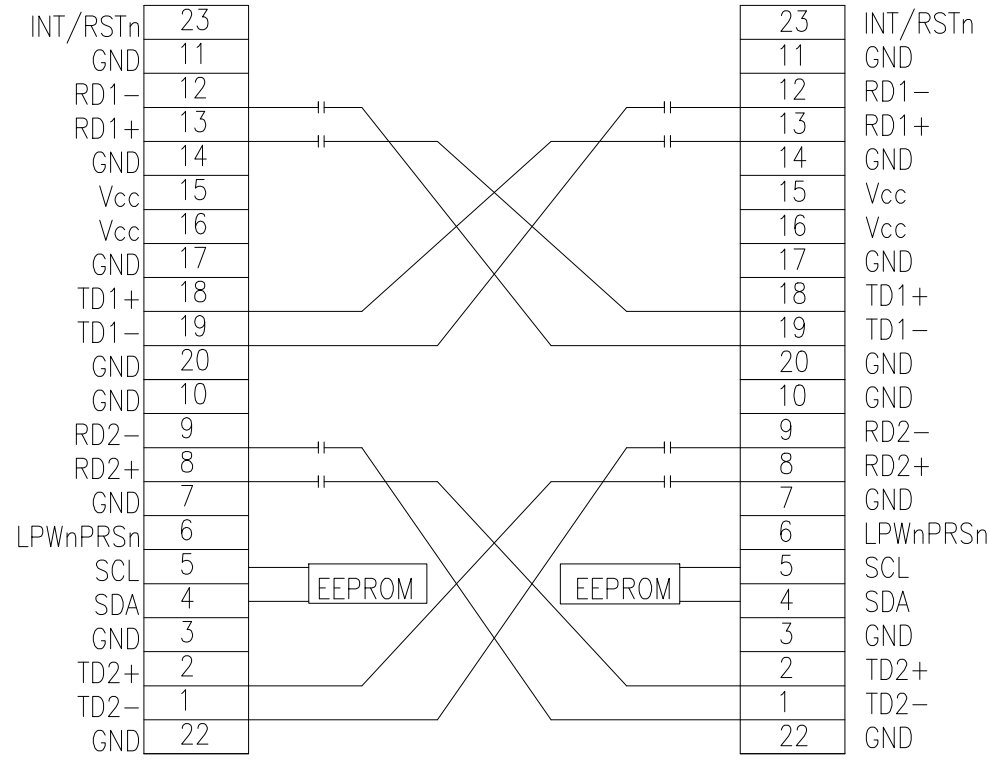

CABLE GAUGE	CABLE "OD"	STATIC BEND RADIUS "R"	DYNAMIC BEND RADIUS "R"
30AWG	5.6MM	13.0MM	56MM

GENERAL TOLERANCE X ± .X ± 0.40 .XX ± 0.30 .XXX ± 0.20	ANGLE TOLERANCE X° ± .X° ± .XX° ± .XXX° ±	DRAWN	DATE	
FINISH		CHECKED	DATE	
SCALE N/A		APPROVED		PART NUMBER 320-10538-XX
SHEET 2 OF 3		UNIT mm		DRAWING NO. 320-10538
				SIZE A4 REV. X1

PACKAGING:

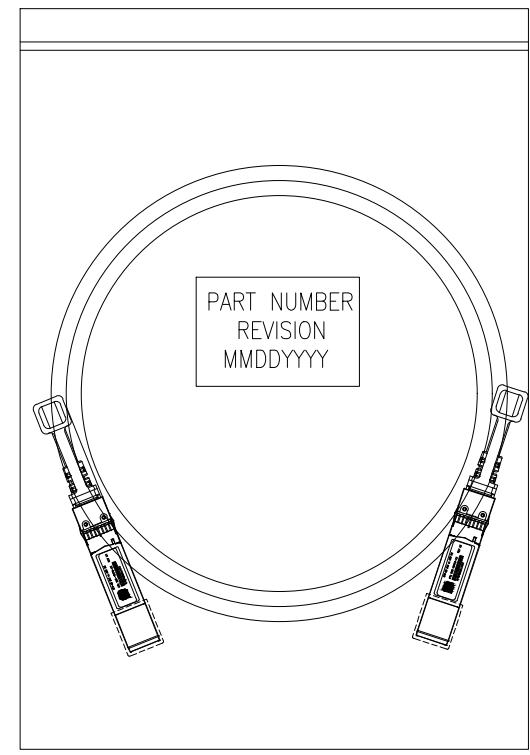
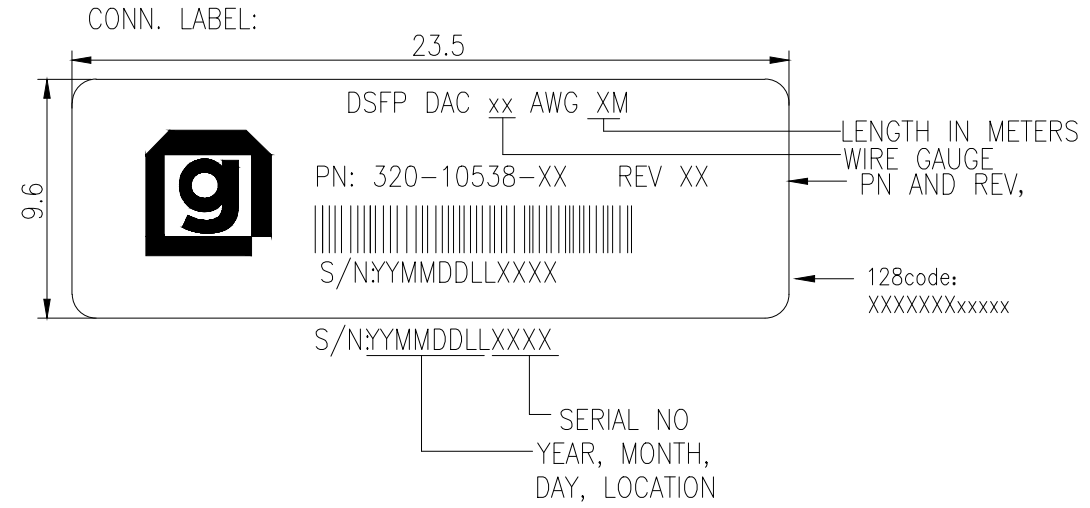


TABLE A

PART NUMBER	xx AWG	LENGTH
320-10538-01	30	1000±30
320-10538-02	30	2000±20
320-10538-03	30	3000±30

GENERAL TOLERANCE X.± .X±0.40 .XX±0.30 .XXX±0.20	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN	DATE	 connected solutions
FINISH		CHECKED	DATE	
SCALE N/A	UNIT mm	APPROVED	DATE	PART NUMBER. 320-10538-XX
SHEET 3 OF 3				DRAWING NO. 320-10538
				SIZE A4 REV. X1