


- NOTES:
1. ALL CABLE 100% OPEN, SHORT, MISS WIRE & TRANSIENT FAULT TEST.
 2. CONDUCTIVE RESISTANCE: 2 OHM MAX.
 3. INSULATION RESISTANCE: 10M OHM MIN WITH 200VAC AT 10ms.
 4. HIGH FREQUENCY TEST MUST COMPLY WITH PCIE GEN5 REQUIREMENT.
CONNECTOR IMPEDANCE: X OHM ±15 OHM
CABLE IMPEDANCE: X OHM ±10 OHM
 5. ALL MATERIAL AND PROCESS MUST BE MEET THE REQUIREMENT OF RoHS2.0

ORDER INFORMATION
320-10503-XX
LENGTH: 1=0.5M, 2=1.0M
IMPEDANCE: 0=85ohm, 1=92ohm, 2=100ohm.

6	NYLON BRAND	A/R	COLOR:BLACK
5	MCIO 74P	2PCS	MCIO 74P STRAIGHT: BLACK COLOR, PULL TAB: BLUE COLOR.
4	LABEL	1PCS	LABLE, BLACK INK
3	ACETATE TAPE	A/R	ACETATE TAPE, BLACK.
2	MCIO 124P	2PCS	MCIO 124P STRAIGHT: BLACK COLOR, PULL TAB: BLUE COLOR.
1	FLATFAST	A/R	TWINAX, GEN5
ITEM	NAME	Q'TY	DESCRIPTION

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWN	DATE	
X.±	X°±	ZAKK	6/7/2023	
.X±0.20	.X°±	DESIGN	DATE	TITLE
.XX±0.10	.XX°±	CHECKED	DATE	MCIO 124P STR TO MCIO 2X74P STR
.XXX±0.05	.XXX°±	APPROVED	DATE	PART NUMBER.
MATL	FINISH	SCALE	UNIT	320-10503-XX
SCALE N/A	UNIT mm	SHEET 1 OF 2		DRAWING NO.
				320-10503
				SIZE A4
				REV. X1

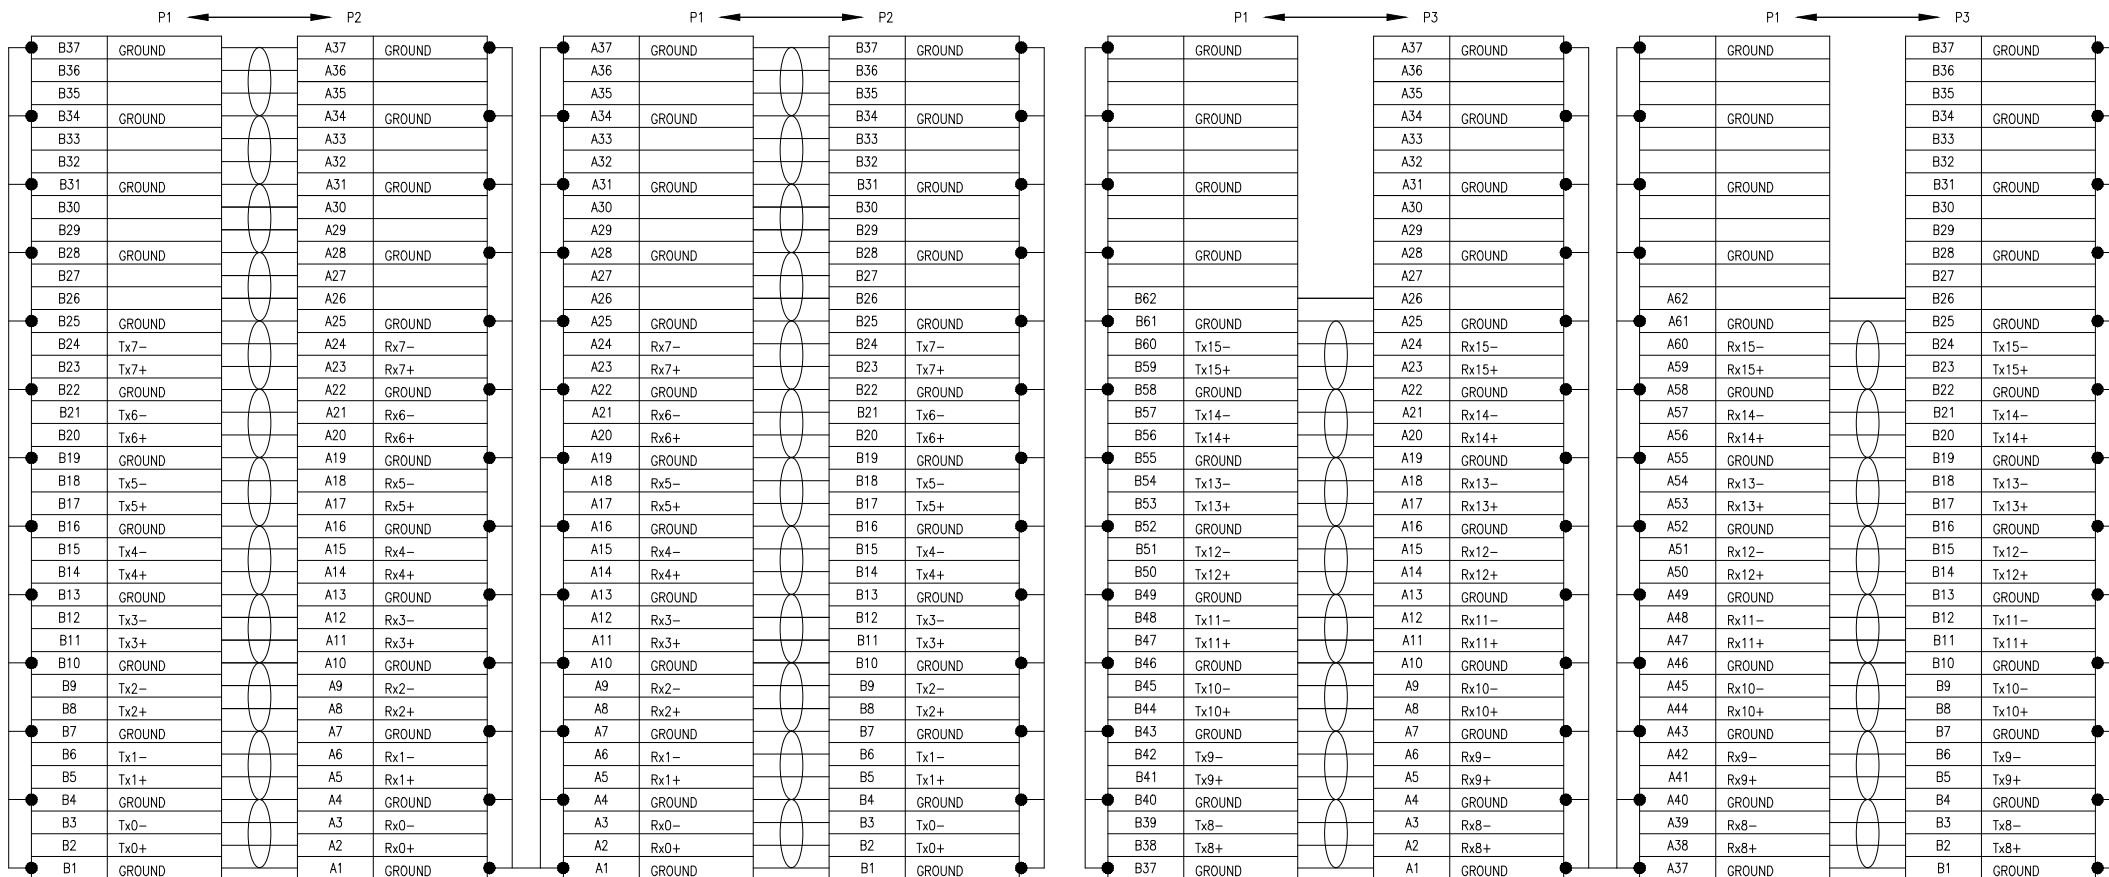

LABEL INFORMATION

P/N:320-10503-XX
PCIe 5.0 XX 0hm
REV. XX
YYMMDDLXXXX

FONT: ARIAL
HEIGHT: 2.0mm Min

GENERAL TOLERANCE X.± .XX±0.20 .XX±0.10 .XXX±0.05	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN ZAKK	DATE 6/7/2023		TITLE MCIO 124P STR TO MCIO 2X74P STR
FINISH		CHECKED	DATE		PART NUMBER. 320-10503-XX
MATL	SCALE N/A	UNIT mm	APPROVED	DATE	DRAWING NO. 320-10503
SHEET 2 OF 2				SIZE A4	REV. X1