

NOTES:



1. ALL CABLE 100% OPEN, SHORT, MISS WIRE & TRANSIENT FAULT TEST.
2. CONDUCTIVE RESISTANCE: 2 OHM MAX.
3. INSULATION RESISTANCE: 10M OHM MIN WITH 200VAC AT 10ms.
4. HIGH FREQUENCY TEST MUST COMPLY WITH PCIE GEN5 REQUIREMENT.
CONNECTOR IMPEDANCE: X OHM ±15 OHM
CABLE IMPEDANCE: X OHM ±10 OHM
5. ALL MATERIAL AND PROCESS MUST BE MEET THE REQUIREMENT OF RoHS2.0

ORDER INFORMATION

320-10504-XX
 LENGTH: 1=0.5M, 2=1.0M
 IMPEDANCE: 0=85ohm, 1=92ohm, 2=100ohm.

GENERAL TOLERANCE X.± .X±0.20 .XX±0.10 .XXX±0.05	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN ZAKK	DATE 6/7/2023	
MATERIAL FINISH		CHECKED	DATE	
SCALE N/A	UNIT mm	APPROVED	DATE	PART NUMBER 320-10504-XX
SHEET 1 OF 2				DRAWING NO. 320-10504
				SIZE A4 REV. X1

ITEM	NAME	Q'TY	DESCRIPTION
5	NYLON BRAND	A/R	COLOR:BLACK
4	LABEL	1PCS	LABLE, BLACK INK
3	ACETATE TAPE	A/R	ACETATE TAPE, BLACK.
2	MCIO 148P	2PCS	MCIO 148P STRAIGHT: BLACK COLOR, PULL TAB: BLUE COLOR.
1	FLATFAST	A/R	TWINAX, GEN5

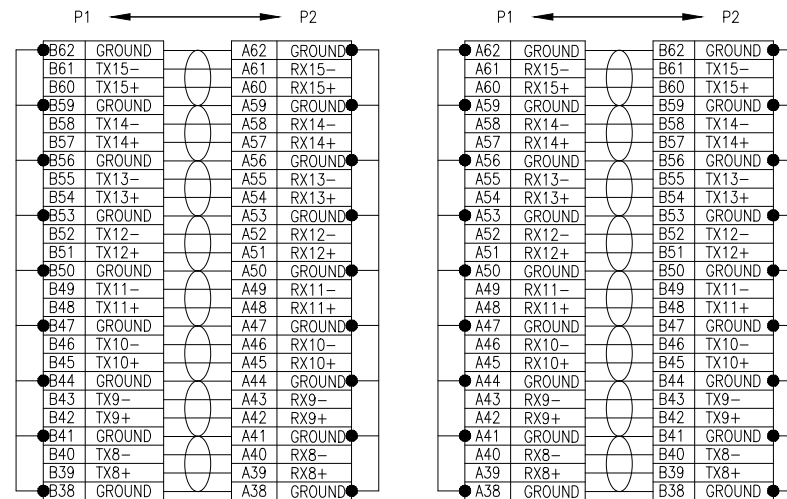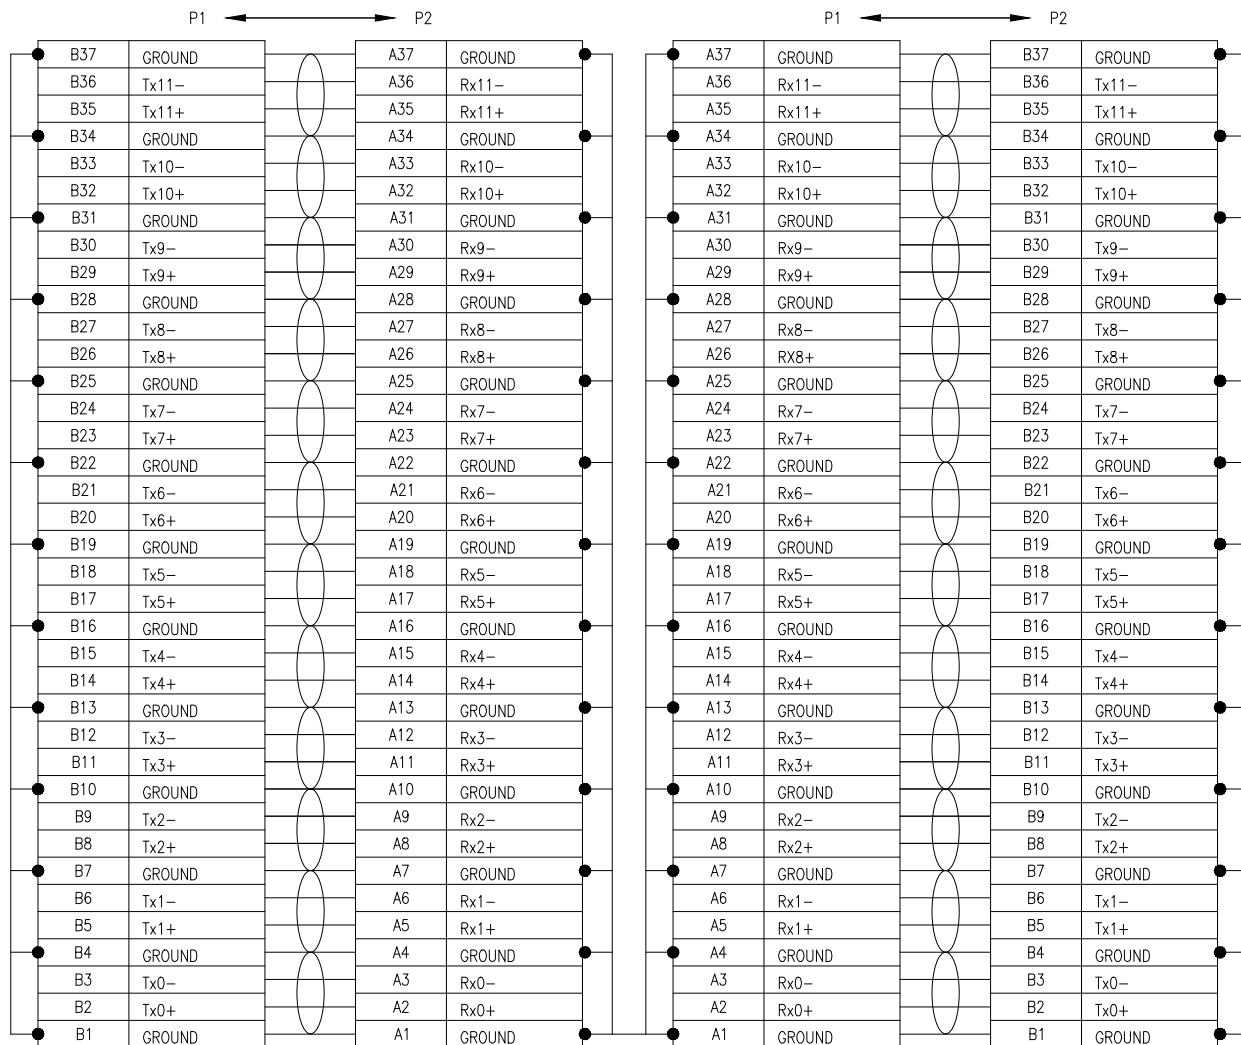

LABEL INFORMATION

P/N:320-10504-XX
Pcle 5.0 XX Ohm
REV. XX
YYMMDDLLXXXX

FONT: ARIAL
HEIGHT: 2.0mm Min

GENERAL TOLERANCE X.± .X±0.20 .XX±0.10 .XXX±0.05	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN ZAKK	DATE 6/7/2023	
MATERIAL		DESIGN	DATE	
FINISH		CHECKED	DATE	PART NUMBER 320-10504-XX
SCALE N/A	UNIT mm	APPROVED	DATE	DRAWING NO. 320-10504
SHEET 2 OF 2				SIZE A4 REV. X1

ITEM	NAME	Q'TY	DESCRIPTION
1			
2			
3			
4			
5			