
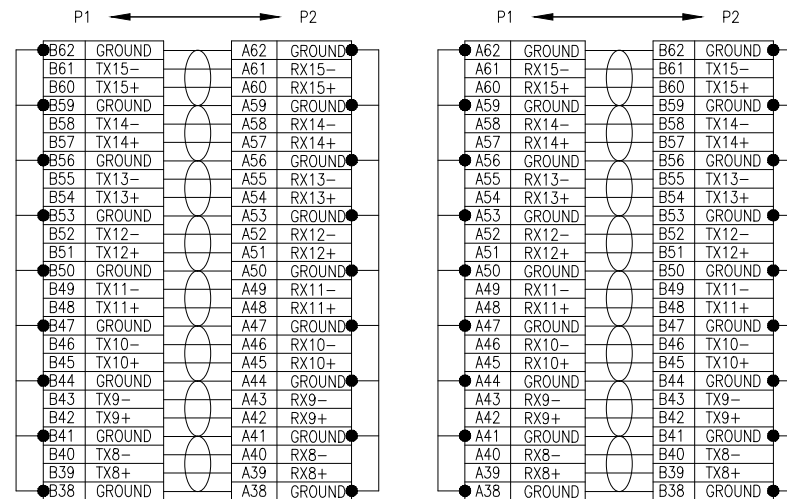


- NOTES:
1. ALL CABLE 100% OPEN, SHORT, MISS WIRE & TRANSIENT FAULT TEST.
 2. CONDUCTIVE RESISTANCE: 2 OHM MAX.
 3. INSULATION RESISTANCE: 10M OHM MIN WITH 200VAC AT 10ms.
 4. HIGH FREQUENCY TEST MUST COMPLY WITH PCIE GEN5 REQUIREMENT.
CONNECTOR IMPEDANCE: X OHM ±15 OHM
CABLE IMPEDANCE: X OHM ±10 OHM
 5. ALL MATERIAL AND PROCESS MUST BE MEET THE REQUIREMENT OF RoHS2.0

ORDER INFORMATION
320-10648-XX
LENGTH: 1=0.5M, 2=1.0M
IMPEDANCE: 0=85ohm, 1=92ohm, 2=100ohm.

ITEM	NAME	Q'TY	DESCRIPTION
6	NYLON BRAND	A/R	COLOR:BLACK
5	MCIO 124P	1PCS	MCIO 124P RIGHT ANGLE: BLACK COLOR, PULL TAB: BLUE COLOR.
4	LABEL	1PCS	LABLE, BLACK INK
3	ACETATE TAPE	A/R	ACETATE TAPE, BLACK.
2	MCIO 124P	1PCS	MCIO 124P STRAIGHT: BLACK COLOR, PULL TAB: BLUE COLOR.
1	TWINAX	A/R	TWINAX, GEN5

GENERAL TOLERANCE X.± .X±0.20 .XX±0.10 .XXX±0.05	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN ZAKK	DATE 6/5/2023	
MATERIAL		DESIGN	DATE	
FINISH		CHECKED	DATE	PART NUMBER 320-10648-XX
SCALE N/A	UNIT mm	APPROVED	DATE	DRAWING NO. 320-10648
SHEET 1 OF 2				SIZE A4 REV. X1

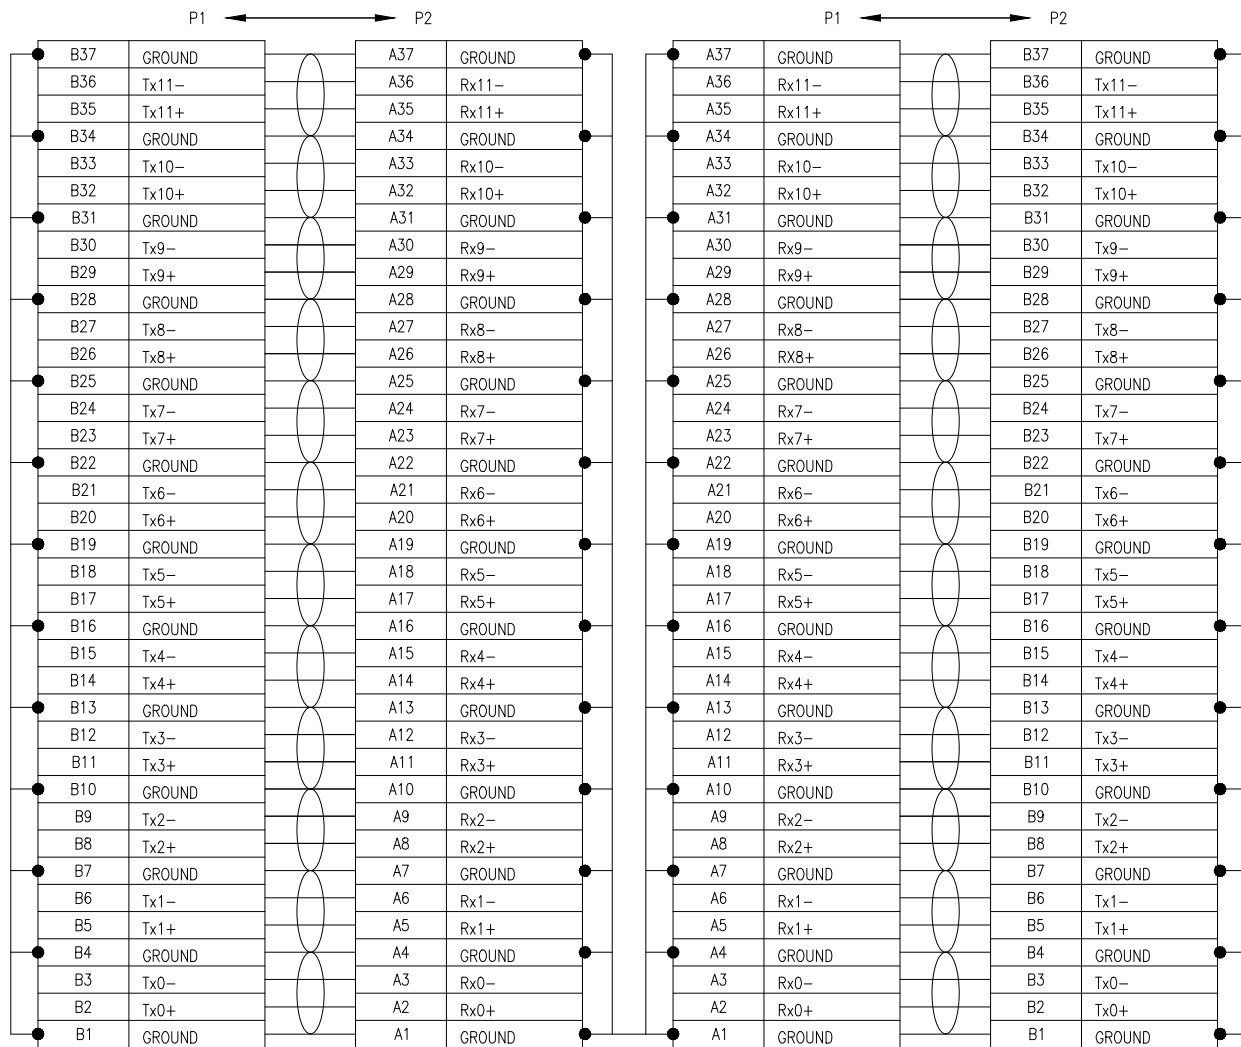

LABEL INFORMATION

P/N:320-10648-XX
 PCIe 5.0 XX Ohm
 REV. XX
 YYMMDDLLXXXX

FONT: ARIAL
 HEIGHT: 2.0mm Min

GENERAL TOLERANCE X.± .X±0.20 .XX±0.10 .XXX±0.05	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN ZAKK	DATE 6/5/2023	
MATERIAL		DESIGN	DATE	
FINISH		CHECKED	DATE	PART NUMBER 320-10648-XX
SCALE N/A	UNIT mm	APPROVED	DATE	DRAWING NO. 320-10648
SHEET 2 OF 2				SIZE A4 REV. X1

ITEM	NAME	Q'TY	DESCRIPTION
1			
2			
3			
4			
5			