

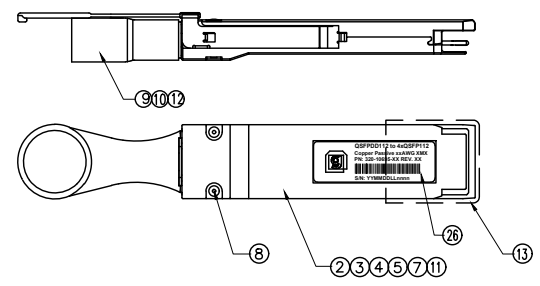











REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		INITIAL	WATTS	3/31/2024

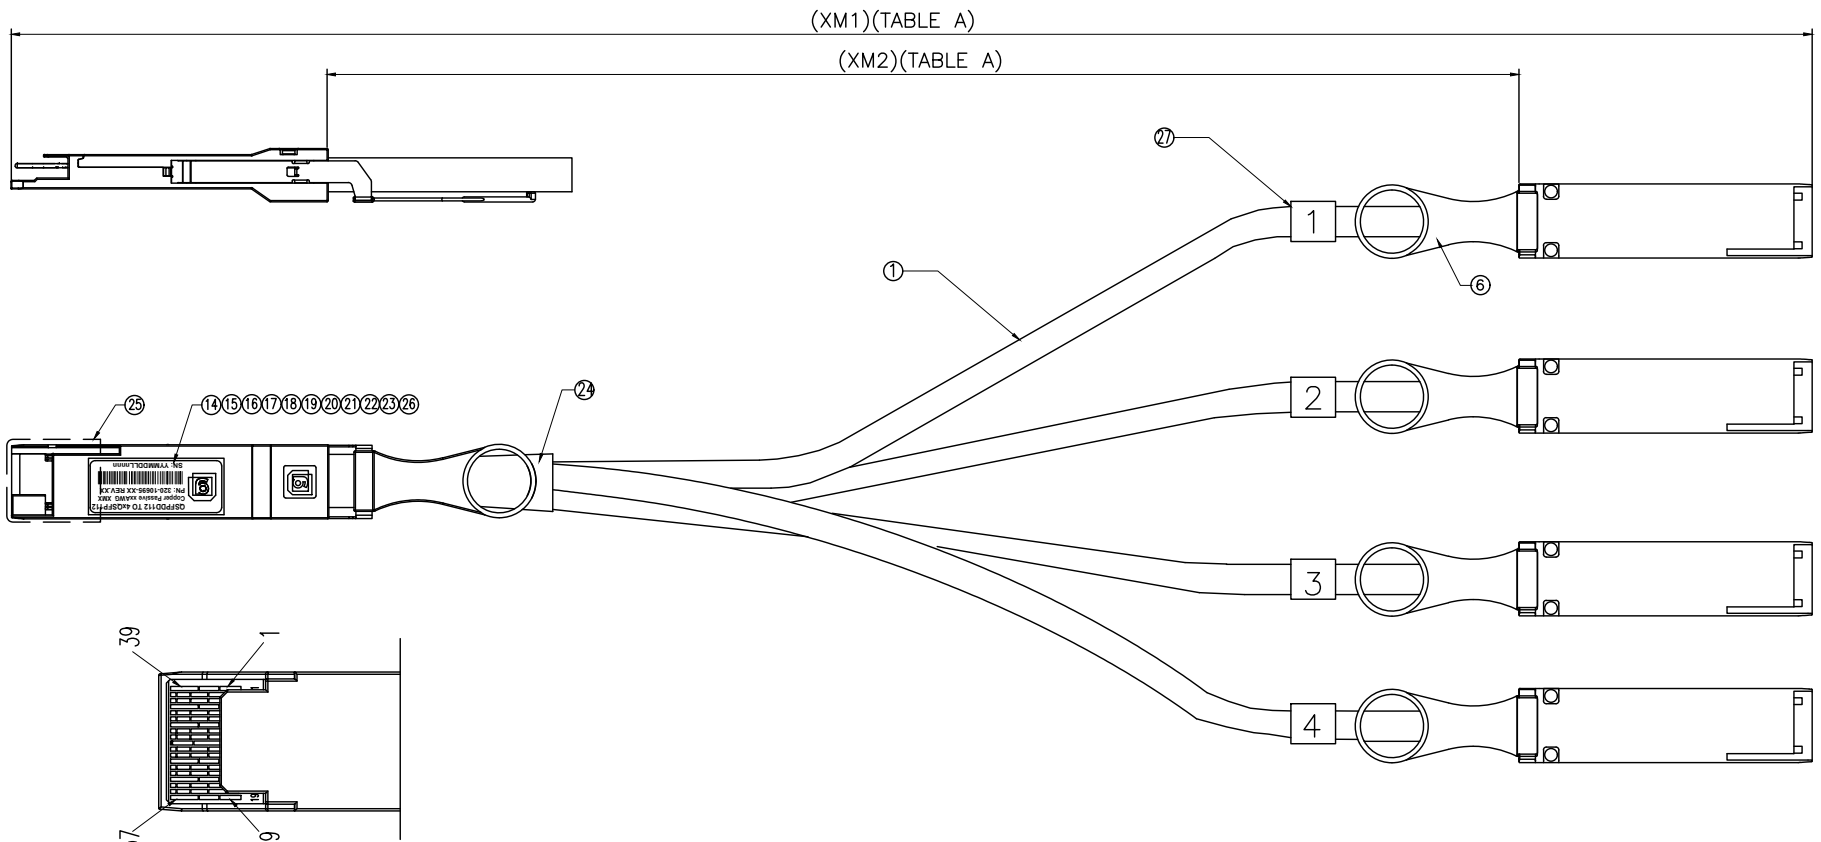

- NOTE(注释):
- CABLE ASSEMBLY IMPEDANCE: 100±10 ohm.
成品特性阻抗: 100±10 欧姆
 - 100% CONDUCTOR TEST, TEST CONDITION:VOLTAGE 5V,INSULTION RESISTANCE 10M ohm, CONDUCTION RESISTANCE MAX 3 ohm
100% 导通测试, 测试条件为电压5V, 绝缘10M欧姆, 导通电阻不大于3欧姆
 - HIGH-FREQUENCY TEST ACCORDING TO IEEE802.3 STANDARD.
高频测试依照IEEE802.3标准测试
 - ALL MATERIAL MUST COMPLY WITH ROHS2.0.
所有物料必须符合ROHS2.0

QUALITY SYMBOLS MAJOR CRITICAL	DRAWN BY WATTS	DATE 3/31/2024		
	CHECKED BY	DATE		
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ± .X ±0.5 .XX ±0.3 .XXX ± ANGLES ±2°	APPROVED BY	DATE	TITLE QSFPDD112 800G to 4xQSFP112 200G	
	UNITS mm		SIZE A4	RFQ NO. 320-10695-XX
	SCALE N/A	SHEET NO. 1 OF 3	REV X1	DWG NO. 320-10695

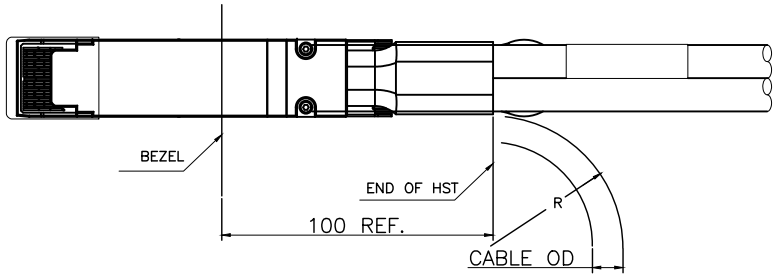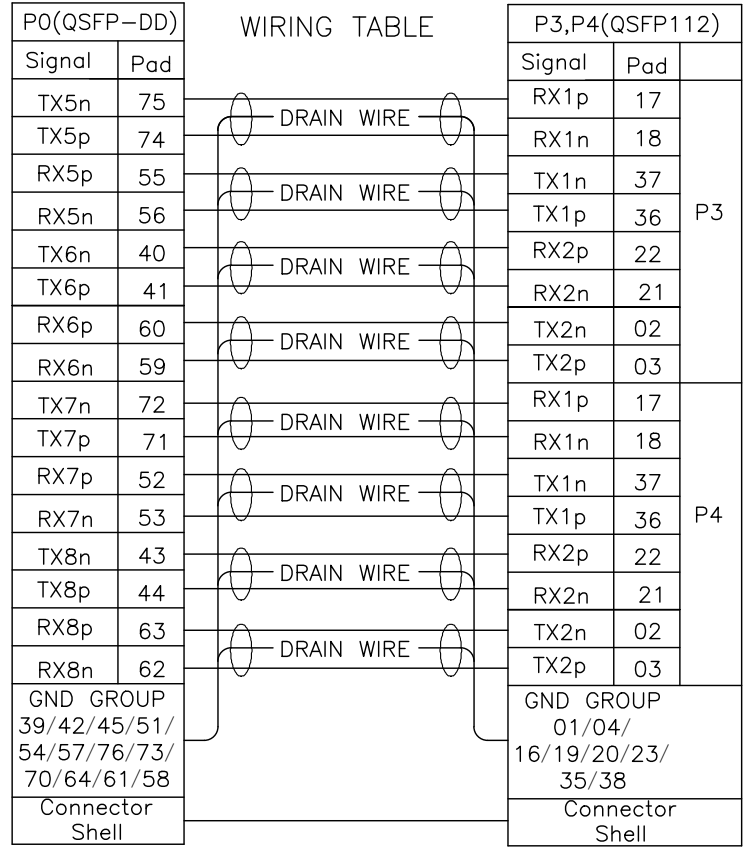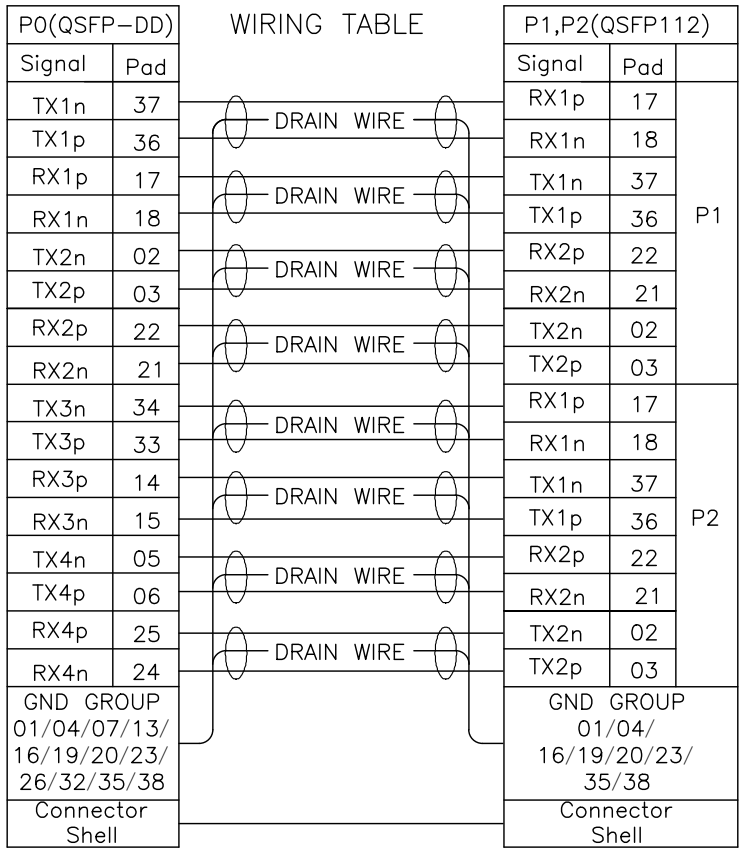

CABLE GAUGE	CABLE "OD"	STATIC BEND RADIUS "R"	DYNAMIC BEND RADIUS "R"
30AWG	6.7MM	33.5MM	67MM
28AWG	7.9MM	39.5MM	79MM

QUALITY SYMBOLS MAJOR CRITICAL	DRAWN BY WATTS	DATE 3/31/2024	
	CHECKED BY	DATE	
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ± .X ±0.5 .XX ±0.3 .XXX ± ANGLES ±2°	APPROVED BY	DATE	TITLE QSFPDD112 800G to 4xQSFP112 200G
	UNITS mm		SIZE A4
SCALE N/A	SHEET NO. 2 OF 3	REV X1	DWG NO. 320-10695



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		INITIAL	WATTS	3/31/2024

TABLE A				
PART NUMBER	WIRE TYPE	xx AWG	XM1 LENGTH	XM2 LENGTH
320-10695-01	PVC	30	500±10	
320-10695-02	PVC	30	1000±10	
320-10695-03	PVC	30	1500±15	
320-10695-04	PVC	28	2000±20	
320-10695-05	PVC	28	2500±25	
320-10695-06	PVC	28	3000±30	



⑳ CONN. LABEL(壳标):



㉑ CABLE LABEL(线标)

PACKAGING:

27	CABLE LABEL(线标)	BLANK WHITE LABEL, 40*10	4
26	BACKSHELL LABEL(壳标)	WHITE LABEL, PET	5
25	QSFP-DD DUST COVER(防尘盖)	LDPE, NATURAL	1
24	HEAT SHRINKABLE TUBE(热缩套管)	HEAT SHRINK TUBE	A/R
23	QSFP-DD INNER MOLD(内模)	HOT-MELT GLUE	A/R
22	UV GLUE(UV胶)	LOCTITE	1
21	COPPER FOIL(铜箔)	COPPER	1
20	QSFP-DD SCREW(螺钉)	ALUMINIUM ALLOY	2
19	QSFP-DD SPRING(弹簧)	HANDED ROTATION, SWPB	2
18	QSFP-DD PULL TAB(拉带)	PA66 S1300	1
17	QSFP-DD LATCH(挂钩)	STAINLESS STEEL	1
16	QSFP-DD BOTTOM SHELL(下壳)	Zn ALLOY, PLATED Ni OVER Cu	1
15	QSFP-DD TOP SHELL(上壳)	Zn ALLOY, PLATED Ni OVER Cu	1
14	QSFP-DD PCBA(PCB 成品)	QSFP-DD PCBA, 76P, Au 30u*Min	1
13	QSFP DUST COVER(防尘盖)	LDPE, NATURAL	4
12	HEAT SHRINKABLE TUBE(热缩套管)	ø9.5MM,	A/R
11	QSFP INNER MOLD(内模)	HOT-MELT GLUE	A/R
10	QSFP BRASS BUCKLE(铜扣)	BRASS, PLATED Ni	4
9	QSFP COPPER RING(铜环)	COPPER, PLATED Ni	4
8	QSFP RIVET(铆钉)	ALUMINIUM ALLOY	8
7	QSFP SPRING(弹簧)	HANDED ROTATION, SWPB	8
6	QSFP PULL TAB(拉带)	PA66 S1300, SKY BLUE	4
5	QSFP LATCH(挂钩)	STAINLESS STEEL	4
4	QSFP BOTTOM SHELL(下壳)	Zn ALLOY, PLATED Ni OVER Cu	4
3	QSFP TOP SHELL(上壳)	Zn ALLOY, PLATED Ni OVER Cu	4
2	QSFP56 PCB ASSEMBLY(PCB 成品)	QSFP56 PCB, 38P, Au 30u*Min	4
1	RAW CABLE(线材)	TABLE A	A/R
ITEM	NAME	DESCRIPTION	Q'TY

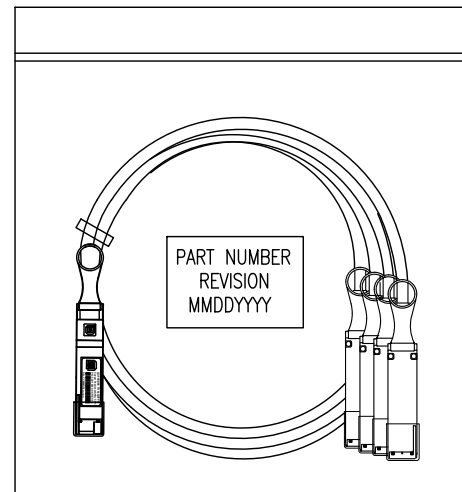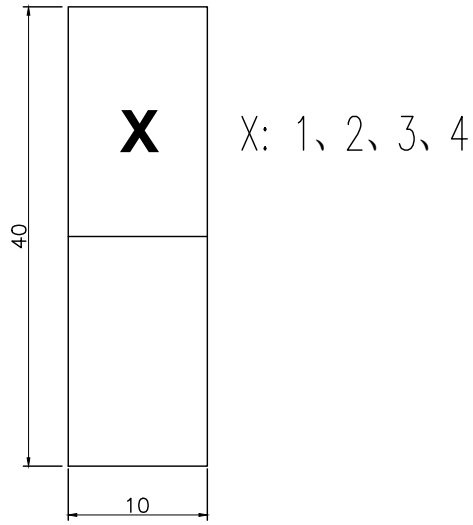

QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ	DRAWN BY	DATE	
	WATTS	3/31/2024	
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ± .X ±0.5 .XX ±0.3 .XXX ± ANGLES ±2°	CHECKED BY	DATE	TITLE QSFPDD112 800G to 4xQSFP112 200G
	APPROVED BY	DATE	
UNITS	mm	SIZE	A4
SCALE	N/A	SHEET NO.	3 OF 3
REV	X1	RFQ NO.	320-10695-XX
DWG NO.	320-10695		