


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL


NOTES :

1. RoHS 6/6 COMPLIANT
2. For G CONNECTOR INSERTION FORCE: 2Kgf~5Kgf
3. For G CONNECTOR WITHDRAW FORCE: 1kgf~4kgf
4. For G CONNECTOR PULL FORCE: 20Kgf Max
5. Input and Output Return Loss(dB) 14dB 5MHz to 1200MHz .
6. Maximum Insertion Loss(dB) 0.2dB at 1200MHz .
7. Flatness(dB) ±0.1dB 5MHz to 1200MHz .
8. One piece design.

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Jeff	10/21/13'
B		UPDATED DRAWING	Sun	05/05/15'
C		UPDATED DRAWING	Ethan	05/18/17'
D		UPDATED DRAWING	Ethan	09/03/20'
E		UPDATED PACKING QTY	Ethan	09/15/20'



OK= Ground fingers shall be flush or below this surface

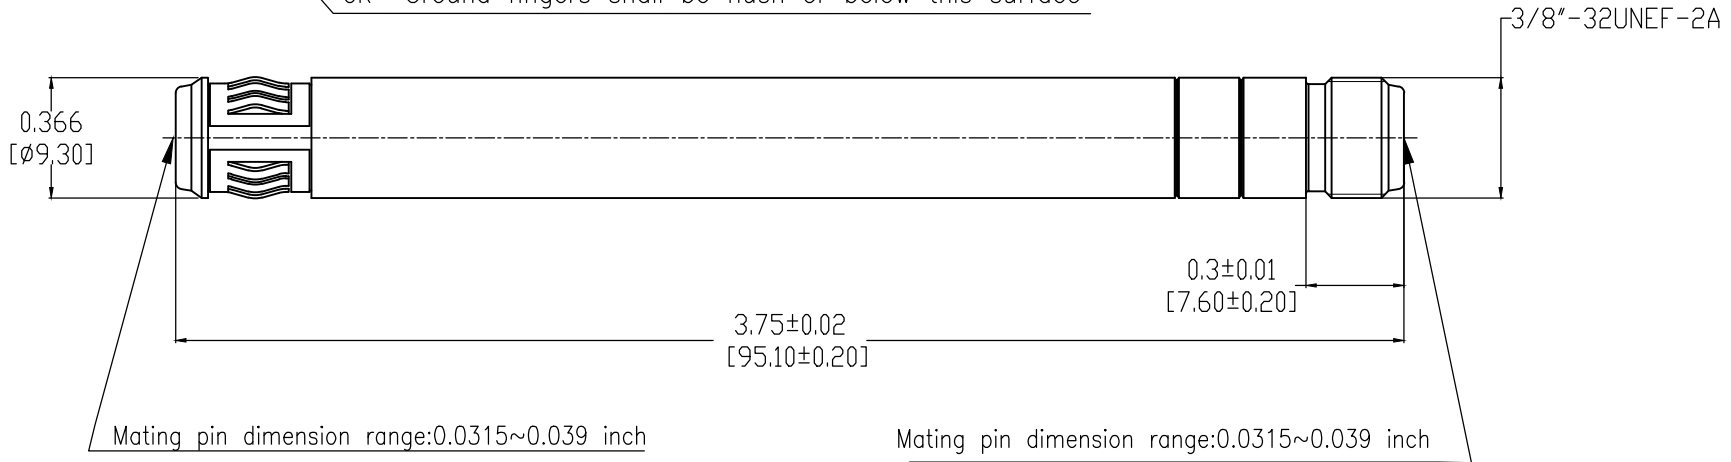

PART NUMBER:
GT20-200250-XX

BLANK: W/O LABEL, PACKING 50PCS/BAG
01: W/LABEL, PACKING 10PCS/BAG

ITEM	NAME	QTY	DESCRIPTION	NOTE
5	CENTER PIN	1	BRASS, GOLD FLASH OVER NICKEL 40u" PLATING	
4	BODY	1	BRASS, NICKEL 40u" PLATING	
3	SPRING CLIP	1	BERYLLIUM COPPER, TIN 60u" PLATING OVER NICKEL 40u" PLATING	280-10054-01
2	CENTER CONTACT	2	BERYLLIUM COPPER, GOLD FLASH OVER NICKEL 40u" PLATING	
1	INSULATOR	2	TEFLON	UL94V-0

GENERAL TOLERANCE X ± .X ± 0.015 .XX ± 0.010 .XXX ± 0.005	ANGLE TOLERANCE	DRAWN Ethan	DATE 05/18/17'	
MATL SEE BOM	FINISH SEE NOTES	CHECKED	DATE	
SCALE N/A	UNIT inch	APPROVED Lucky	DATE 05/18/17'	PART NUMBER: GT20-200250-XX
SHEET 1 OF 1				DRAWING NO. GT20-200250
				SIZE A4 REV. E