




DETAIL A  
SCALE 4:1

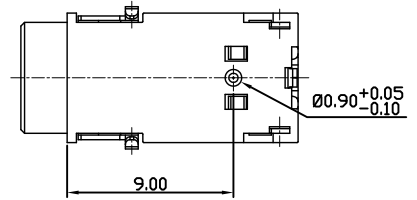

- NOTES:**
- MECHANICAL CHARACTERISTICS:
    - INSERTION FORCE: 0.3~3.0kgf(2.94N~29.4N)
    - EXTRACTION FORCE: 0.3~3.0kgf(2.94N~29.4N)
    - CONTACT: 0.1Kgf (1N)
    - LIFE TEST: 5000 CYCLES
  - ELECTRICAL CHARACTERISTICS:
    - CURRENT RATING: 1A
    - VOLTAGE RATING: 12V
    - CONTACT RESISTANCE: 50m Ohms MAX.
    - INSULATION RESISTANCE: 100M Ohms MIN.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V/1MIN.
  - ENVIRONMENTAL CHARACTERISTIC:
    - OPERATING TEMPERATURE: -40°C ~ +70°C
    - STORAGE TEMPERATURE: -40°C ~ +70°C
    - OPERATION / STORAGE HUMIDITY: 95% OR LESS

ORDER INFORMATION:  
GTI08-20077

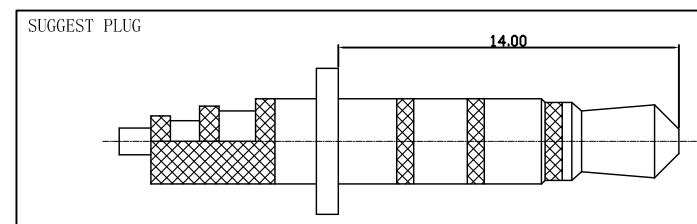

5	HOUSING	1	PBT	
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE t=0.25	Sn : 150u"
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE t=0.25	Sn : 150u"
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE t=0.25	Sn : 150u"
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE t=0.25	Sn : 150u"
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				TOLERANCE			
REV	ECN NO.	NAME	DATE	..XXX±	..XXX°±	APPD:	MAT'L:
X4	CHANGE DIM. & MATERIAL THICKNESS	Kevin	07/30/08'	LINEAR	ANGLES		
X3	ADD VIEW	Vegas	07/08/08'	X.±	X°± 10°		
X2	MODIFY DIMENSIONS	Kevin	07/07/08'	..X± 0.20	..X°± 5°		
X1	ISSUED	Kevin	07/03/08'	..XX± 0.10	..XX°± 2°		

**GENESIS TECHNOLOGY, INC**  
7F, No. 191, Sec. 2  
Chung-Yang Rd.,  
Tu-Cheng City  
Taipei Hsien, Taiwan

DRWN: Kevin  
Q'TY:

TITLE: PHONE JACK

PART NO. GTI08-20077

DWG NO. GTI08-20077

UNITS	SCALE	SHEET	REV
MM	NONE	1 OF 1	X4